



Parameters

Connection sizes metric	Push-in: 4 | 6 | 8 | 10 | 12
Connection sizes imperial	-
Connection sizes thread	M5 | 1/8 | 1/4 | 3/8 | 1/2
Materials	Body: 1.4404 (AISI 316L) Seal material: FKM Sleeve: 1.4404 (AISI 316L) Grip ring: 1.4310 (AISI 301) Release ring: PVDF white Nipple / Socket: 1.4404 (AISI 316L) Support ring: 1.4305 (AISI 303)
Alternative materials	Sealing: EPDM, VMQ Release ring: 1.4404 (AISI 316L)
Media	Neutral gases or liquids which do not corrode the materials specified
Medium temperature	0 °C – 120 °C
Pressure range	-0,95–20 bar
Thread	Male thread ‚G' cylindrical: Whitworth pipe thread DIN/ISO 228-1 Male thread ‚M': Metric ISO thread DIN 13-1 Male thread ‚R' tapered: Whitworth pipe thread DIN 2999-1 and ISO 7/1 (Dimensions designed for pairing with female thread according to DIN/ISO 228-1) Female thread ‚G' cylindrical: Whitworth pipe thread DIN/ISO 228-1
Price group	13
Special versions	Further variants on request

Straight double stem connector

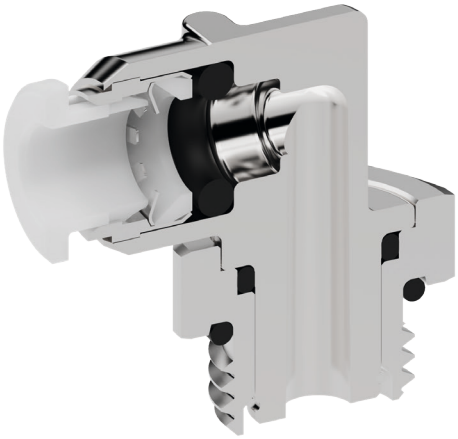




A	B	Ø d1 mm	L1 mm	L2 mm	Weight	Type	Order No.
4 mm	4 mm	2.0	32.0		2.5 g	904X1-D4	283850
6 mm	4 mm	2.0	33.0	16.0	3.3 g	904X4-D6-D4	283852
6 mm	6 mm	4.0	34.5		4.2 g	904X1-D6	283853
8 mm	8 mm	6.0	37.5		6.2 g	904X1-D8	283854
8 mm	6 mm	4.0	37.5	18.0	6.5 g	904X4-D8-D6	283858
10 mm	8 mm	6.0	45.5	18.0	9.7 g	904X4-D10-D8	283859
10 mm	10 mm	8.0	45.5		9.7 g	904X4-D10	283857
12 mm	10 mm	8.0	50.0	24.0	14.0 g	904X4-D12-D10	283860
12 mm	12 mm	10.0	50.0		14.2 g	904X4-D12	283861

Body: 904X4 = 1.4404 (AISI 316L) / 904X1 = 1.4571 (AISI 316 Ti)

Straight stud coupling, male

PN 20 | Medium temperature: -20 °C – 140 °C | Thread type: cylindrical | Thread sealed by an O-ring in recess



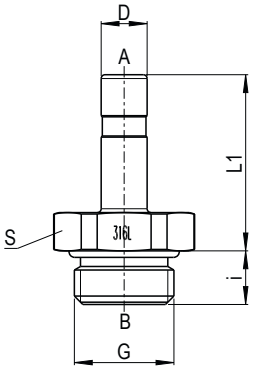


A	B	L1 mm	i mm	S mm	Weight	Type	Order No.
4 mm	M5	21.5	3.5	8.0	3.0 g	908X4-D4-M5FF	383805
4 mm	G 1/8	21.5	5.0	13.0	6.5 g	908X4-D4-1/8FF	383806
4 mm	G 1/4	22.0	7.0	17.0	12.9 g	908X4-D4-1/4FF	383807
6 mm	M5	21.5	3.5	8.0	3.8 g	908X4-D6-M5FF	383811
6 mm	G 1/8	22.5	5.0	13.0	8.5 g	908X4-D6-1/8FF	383812
6 mm	G 1/4	23.0	7.0	17.0	16.6 g	908X4-D6-1/4FF	383813
6 mm	G 3/8	25.0	8.0	19.0	23.0 g	908X4-D6-3/8FF	383814
8 mm	G 1/8	24.5	5.0	13.0	8.0 g	908X4-D8-1/8FF	383816
8 mm	G 1/4	25.0	7.0	17.0	15.8 g	908X4-D8-1/4FF	383817
8 mm	G 3/8	25.0	8.0	19.0	25.4 g	908X4-D8-3/8FF	383818
10 mm	G 1/4	29.0	7.0	17.0	15.9 g	908X4-D10-1/4FF	383821
10 mm	G 3/8	29.0	8.0	19.0	23.4 g	908X4-D10-3/8FF	383822
10 mm	G 1/2	29.5	9.0	24.0	33.5 g	908X4-D10-1/2FF	383823
12 mm	G 1/4	31.0	7.0	17.0	24.3 g	908X4-D12-1/4FF	383824
12 mm	G 3/8	31.0	8.0	19.0	26.3 g	908X4-D12-3/8FF	383825
12 mm	G 1/2	31.5	9.0	24.0	38.1 g	908X4-D12-1/2FF	383826

Straight connector

PN 20 | Seal: FKM | Medium temperature: 0 °C – 120 °C



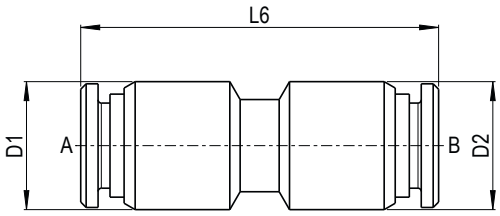


A	B	Ø D1 mm	Ø D2 mm	L6 mm	Weight	Type	Order No.
4 mm	4 mm	9.8	9.8	31.0	8.3 g	958X4-4FF	383054
6 mm	6 mm	11.8	11.8	33.0	10.0 g	958X4-6FF	383060
8 mm	6 mm	11.8	13.8	35.2	14.7 g	958X4-8-6FF	383067
8 mm	8 mm	13.8	13.8	36.7	13.7 g	958X4-8FF	383062
10 mm	10 mm	16.4	16.4	41.7	20.5 g	958X4-10FF	383064

Straight stem reducer

PN 20



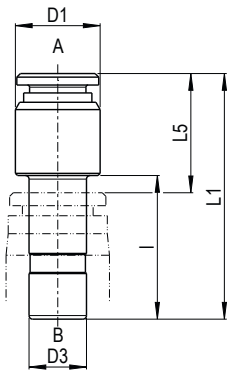


A	B	Ø D1 mm	L1 mm	L5 mm	l mm	Weight	Type	Order No.
4 mm	6 mm	9.8	31.3	17.5	18.0	6.3 g	947X4-4FF-D6	383652
4 mm	8 mm	9.8	34.0	16.5	20.0	10.2 g	947X4-4FF-D8	383654
6 mm	8 mm	11.8	34.2	16.6	20.0	9.3 g	947X4-6FF-D8	383653
6 mm	10 mm	11.8	38.8	20.5	24.0	16.1 g	947X4-6FF-D10	383656
8 mm	10 mm	13.8	39.1	19.0	24.0	13.2 g	947X4-8FF-D10	383660
8 mm	12 mm	13.8	42.0	13.9	26.0	21.4 g	947X4-8FF-D12	383661
10 mm	12 mm	16.4	42.6	20.6	26.0	18.1 g	947X4-10FF-D12	383664

Straight adaptor, male

PN 20 | Seal: FKM | Medium temperature: 0 °C – 120 °C | Thread type: conical



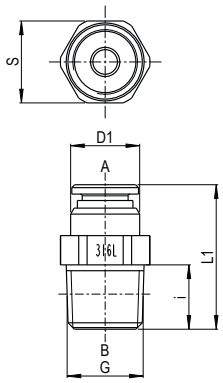


A	B	Ø D1 mm	L1 mm	i mm	S mm	Weight	Type	Order No.
4 mm	R 1/8	9.8	20.5	7.5	10.0	6.7 g	951X4-4FF-1/8K	380456
6 mm	R 1/8	11.8	21.7	7.5	12.0	7.5 g	951X4-6FF-1/8K	380462
6 mm	R 1/4	11.8	24.7	11.0	14.0	14.5 g	951X4-6FF-1/4K	380463
8 mm	R 1/8	13.8	27.2	7.5	14.0	12.3 g	951X4-8FF-1/8K	380466
8 mm	R 1/4	13.8	26.7	11.0	14.0	14.2 g	951X4-8FF-1/4K	380467
8 mm	R 3/8	13.8	24.7	11.5	17.0	22.0 g	951X4-8FF-3/8K	380468
10 mm	R 1/4	16.4	32.6	11.0	17.0	22.3 g	951X4-10FF-1/4K	380471
10 mm	R 3/8	16.4	28.1	11.5	17.0	21.6 g	951X4-10FF-3/8K	380472
10 mm	R 1/2	16.4	26.6	14.0	22.0	38.7 g	951X4-10FF-1/2K	380473
12 mm	R 3/8	19.8	30.0	11.5	22.0	29.8 g	951X4-12FF-3/8K	380475
12 mm	R 1/2	19.8	31.5	14.0	22.0	41.3 g	951X4-12FF-1/2K	380476

Straight adaptor, male

PN 20 | Medium temperature: 0 °C – 120 °C | Thread type: cylindrical | Thread sealed by an O-ring in recess



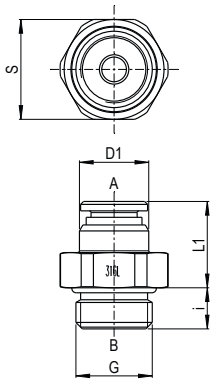


A	B	Ø D1 mm	L1 mm	i mm	S mm	Weight	Type	Order No.
4 mm	M5	9.4	16.8	3.5	8.0	3.4 g	951X4-4FF-M5	380054
4 mm	G 1/8	9.8	14.0	5.0	13.0	8.6 g	951X4-4FF-1/8	380056
6 mm	M5	11.4	17.7	3.5	10.0	4.4 g	951X4-6FF-M5	380060
6 mm	G 1/8	11.8	15.2	5.0	13.0	7.9 g	951X4-6FF-1/8	380062
6 mm	G 1/4	11.8	14.7	7.0	17.0	15.9 g	951X4-6FF-1/4	380063
6 mm	G 3/8	11.8	12.0	8.0	19.0	23.9 g	951X4-6FF-3/8	380064
8 mm	G 1/8	13.8	20.2	5.0	14.0	11.3 g	951X4-8FF-1/8	380066
8 mm	G 1/4	13.8	15.9	7.0	17.0	14.4 g	951X4-8FF-1/4	380067
8 mm	G 3/8	13.8	15.9	8.0	19.0	23.2 g	951X4-8FF-3/8	380068
10 mm	G 1/4	16.4	22.3	7.0	17.0	19.6 g	951X4-10FF-1/4	380071
10 mm	G 3/8	16.4	17.6	8.0	19.0	21.3 g	951X4-10FF-3/8	380072
10 mm	G 1/2	16.4	15.6	9.0	24.0	37.3 g	951X4-10FF-1/2	380073
12 mm	G 1/4	19.8	25.0	7.0	22.0	32.0 g	951X4-12FF-1/4	380074
12 mm	G 3/8	19.8	19.5	8.0	22.0	26.0 g	951X4-12FF-3/8	380075
12 mm	G 1/2	19.8	18.5	9.0	24.0	43.3 g	951X4-12FF-1/2	380076

Straight adaptor, female

PN 20 | Seal: FKM | Medium temperature: 0 °C – 120 °C | Thread type: cylindrical






A	B	Ø D1 mm	L1 mm	i mm	S mm	Weight	Type	Order No.
4 mm	G 1/8	9.8	23.8	7.0	13.0	10.1 g	946X4-4FF-1/8	380706
4 mm	G 1/4	9.8	26.8	9.0	17.0	17.6 g	946X4-4FF-1/4	380707
6 mm	G 1/8	11.8	25.2	7.0	13.0	12.5 g	946X4-6FF-1/8	380712
6 mm	G 1/4	11.9	27.7	9.0	17.0	20.5 g	946X4-6FF-1/4	380713
6 mm	G 3/8	11.8	28.7	10.0	19.0	19.4 g	946X4-6FF-3/8	380714
8 mm	G 1/8	13.8	27.1	7.0	14.0	16.2 g	946X4-8FF-1/8	380716
8 mm	G 1/4	13.8	29.6	9.0	17.0	20.7 g	946X4-8FF-1/4	380717
8 mm	G 3/8	13.8	30.6	10.0	19.0	23.3 g	946X4-8FF-3/8	380718
8 mm	G 1/2	13.8	34.7	13.0	24.0	49.1 g	946X4-8FF-1/2	380723
10 mm	G 1/2	16.4	36.6	13.0	24.0	45.7 g	946X4-10FF-1/2	380719
10 mm	G 1/4	16.4	32.1	9.0	17.0	40.8 g	946X4-10FF-1/4	380720
10 mm	G 3/8	16.4	33.1	10.0	19.0	28.1 g	946X4-10FF-3/8	380721
12 mm	G 1/2	19.8	39.5	13.0	24.0	55.6 g	946X4-12FF-1/2	380726

90° elbow connector

PN 20 | Seal: FKM | Medium temperature: 0 °C – 120 °C



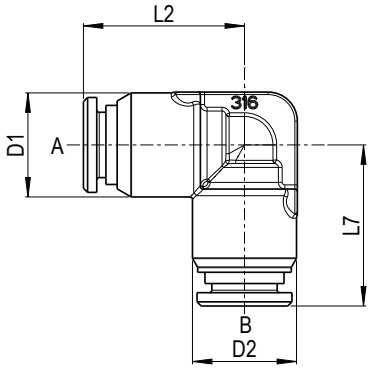


A	B	Ø D1 mm	Ø D2 mm	L2 mm	L7 mm	Weight	Type	Order No.
4 mm	4 mm	10.5	10.5	17.5	17.5	8.3 g	955X4M-4FF	385141
6 mm	6 mm	12.5	12.5	19.4	19.4	11.6 g	955X4M-6FF	384405
8 mm	6 mm	14.5	14.5	22.3	24.8	11.6 g	955X4M-8-6FF	384406
8 mm	8 mm	14.5	14.5	22.3	22.3	16.3 g	955X4M-8FF	384407
10 mm	10 mm	17.0	17.0	25.8	25.8	25.0 g	955X4M-10FF	384409
12 mm	12 mm	20.5	20.5	28.8	28.8	57.4 g	955X4M-12FF	385145

90° elbow connector with stem

PN 20



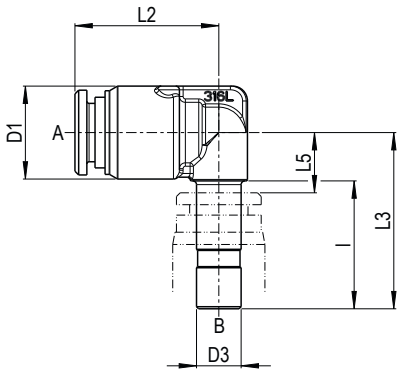


A	B	Ø D1 mm	L2 mm	L3 mm	L5 mm	l mm	Weight	Type	Order No.
6 mm	6 mm	12.5	19.4	23.7	8.0	17.2	10.6 g	911X4M-6FF-D6	384654
8 mm	8 mm	14.5	22.3	26.6	9.0	19.1	17.1 g	911X4M-8FF-D8	384656
10 mm	10 mm	17.0	25.8	30.4	10.0	21.6	25.7 g	911X4M-10FF-D10	384658
12 mm	12 mm	20.5	28.8	34.0	12.0	23.5	39.0 g	911X4M-12FF-D12	384660

90° elbow adaptor, male, positionable

PN 16 | Seal: FKM | Medium temperature: 0 °C – 120 °C | Thread type: cylindrical | Thread sealed by an O-ring in recess | Not suitable for rotary or oscillating movements.



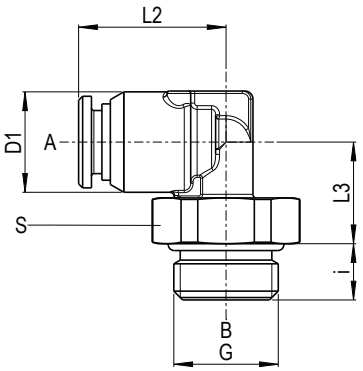


A	B	Ø D1 mm	L2 mm	L3 mm	i mm	S mm	Weight	Type	Order No.
4 mm	M5	10.5	16.6	11.1	3.5	8.0	8.3 g	930X4M-4FF-M5	384103
4 mm	G 1/8	10.5	16.8	11.5	5.0	13.0	12.5 g	930X4M-4FF-1/8	384104
4 mm	G 1/4	10.5	16.8	11.6	7.0	17.0	17.9 g	930X4M-4FF-1/4	384105
6 mm	M5	12.5	17.6	12.1	3.5	8.0	25.0 g	930X4M-6FF-M5	385106
6 mm	G 1/8	12.5	18.3	12.4	5.0	13.0	13.3 g	930X4M-6FF-1/8	384107
6 mm	G 1/4	12.5	18.5	12.7	7.0	17.0	19.7 g	930X4M-6FF-1/4	384108
6 mm	G 3/8	12.5	18.5	13.1	8.0	19.0	27.4 g	930X4M-6FF-3/8	384120
8 mm	G 1/8	14.5	20.2	13.4	5.0	13.0	16.2 g	930X4M-8FF-1/8	384109
8 mm	G 1/4	14.5	21.5	13.6	7.0	17.0	23.8 g	930X4M-8FF-1/4	384110
8 mm	G 3/8	14.5	21.4	13.9	8.0	19.0	28.8 g	930X4M-8FF-3/8	384111
8 mm	G 1/2	14.5	21.4	14.9	9.0	24.0	50.5 g	930X4M-8FF-1/2	384118
10 mm	G 1/4	17.0	24.0	14.9	7.0	17.0	31.5 g	930X4M-10FF-1/4	384112
10 mm	G 3/8	17.0	24.9	15.3	8.0	19.0	37.9 g	930X4M-10FF-3/8	384113
10 mm	G 1/2	17.0	24.9	16.3	9.0	24.0	56.5 g	930X4M-10FF-1/2	384119
12 mm	G 1/4	20.5	25.8	16.6	7.0	17.0	42.5 g	930X4M-12FF-1/4	384114
12 mm	G 3/8	20.5	26.8	17.0	8.0	19.0	49.1 g	930X4M-12FF-3/8	384115
12 mm	G 1/2	20.5	26.8	18.0	9.0	24.0	68.0 g	930X4M-12FF-1/2	384116

90° elbow adaptor, male

PN 20 | Seal: FKM | Medium temperature: 0 °C – 120 °C | Thread type: conical



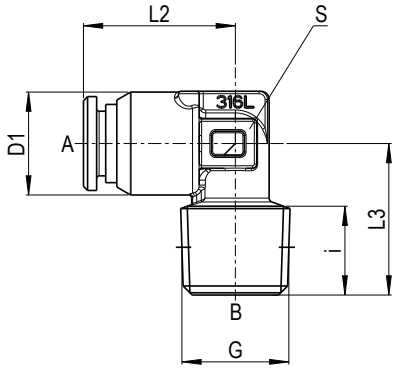


A	B	Ø D1 mm	L2 mm	L3 mm	i mm	S mm	Weight	Type	Order No.
4 mm	R 1/8	10.5	16.8	14.4	7.5	8.0	8.8 g	950X4M-4FF-1/8K	384003
4 mm	R 1/4	10.5	16.8	17.4	10.5	8.0	13.8 g	950X4M-4FF-1/4K	384004
6 mm	R 1/8	12.5	18.4	15.4	7.5	8.0	11.3 g	950X4M-6FF-1/8K	384005
6 mm	R 1/4	12.5	18.5	18.4	10.5	9.0	15.5 g	950X4M-6FF-1/4K	384006
8 mm	R 1/8	14.5	20.2	16.4	7.5	12.0	17.6 g	950X4M-8FF-1/8K	384007
8 mm	R 1/4	14.5	21.5	19.4	10.5	12.0	22.4 g	950X4M-8FF-1/4K	384008
8 mm	R 3/8	14.5	21.4	19.9	11.0	12.0	25.1 g	950X4M-8FF-3/8K	384009
10 mm	R 1/4	17.0	24.0	20.7	10.5	14.0	30.5 g	950X4M-10FF-1/4K	384010
10 mm	R 3/8	17.0	24.9	21.2	11.0	14.0	32.5 g	950X4M-10FF-3/8K	384011
12 mm	R 1/4	20.5	26.8	22.4	10.5	17.0	44.6 g	950X4M-12FF-1/4K	384013
12 mm	R 3/8	20.5	27.8	22.9	11.0	17.0	44.5 g	950X4M-12FF-3/8K	384014

T-connector

PN 20 | Seal: FKM | Medium temperature: 0 °C – 120 °C



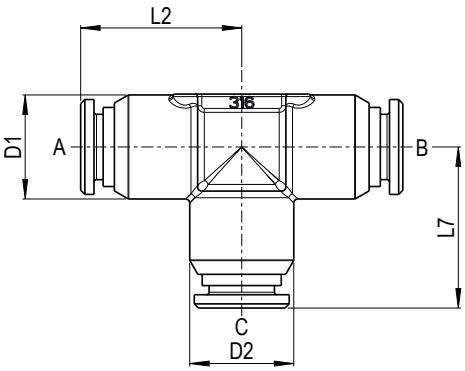


A	B	C	Ø D1 mm	Ø D2 mm	L2 mm	L7 mm	Weight	Type	Order No.
4 mm	4 mm	4 mm	10.5	10.5	17.5	17.5	11.5 g	954X4M-4FF	384453
6 mm	6 mm	6 mm	12.5	12.5	19.4	19.4	15.8 g	954X4M-6FF	384455
8 mm	8 mm	8 mm	13.8	13.8	22.3	22.3	22.2 g	954X4M-8FF	384457
10 mm	10 mm	8 mm	17.0	17.0	25.8	28.1	46.2 g	954X4M-10-8FF	384458
10 mm	10 mm	10 mm	17.0	17.0	25.8	25.8	33.9 g	954X4M-10FF	384459
12 mm	12 mm	12 mm	20.5	20.5	28.8	28.8	63.3 g	954X4M-12FF	384461

T-adaptor, male, positionable

PN 16 | Seal: FKM | Medium temperature: 0 °C – 120 °C | Thread type: cylindrical | Thread sealed by an O-ring in recess | Not suitable for rotary or oscillating movements.



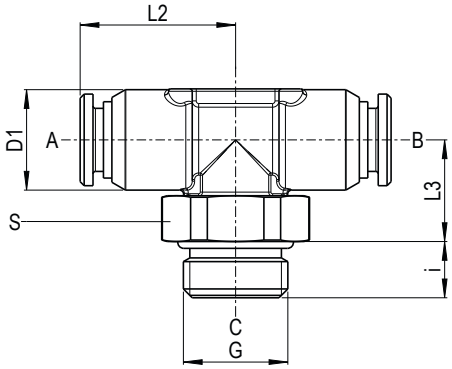


A	B	C	Ø D1 mm	L2 mm	L3 mm	i mm	S mm	Weight	Type	Order No.
4 mm	4 mm	M5	10.5	16.6	11.1	3.5	8.0	11.3 g	921X4M-4FF-M5	384303
4 mm	4 mm	G 1/8	10.5	17.3	11.5	5.0	13.0	15.9 g	921X4M-4FF-1/8	384304
4 mm	4 mm	G 1/4	10.5	17.3	11.6	7.0	17.0	23.5 g	921X4M-4FF-1/4	384305
6 mm	6 mm	M5	12.5	17.6	12.1	3.5	8.0	16.4 g	921X4M-6FF-M5	384306
6 mm	6 mm	G 1/8	12.5	18.3	12.4	5.0	13.0	20.5 g	921X4M-6FF-1/8	384307
6 mm	6 mm	G 1/4	12.5	19.5	12.7	7.0	17.0	27.6 g	921X4M-6FF-1/4	384308
8 mm	8 mm	G 1/8	14.5	20.2	13.4	5.0	13.0	25.6 g	921X4M-8FF-1/8	384309
8 mm	8 mm	G 1/4	14.5	21.5	13.6	7.0	17.0	32.2 g	921X4M-8FF-1/4	384310
8 mm	8 mm	G 3/8	14.5	22.4	13.9	8.0	19.0	39.2 g	921X4M-8FF-3/8	384311
8 mm	8 mm	G 1/2	14.5	22.4	14.9	9.0	24.0	63.5 g	921X4M-8FF-1/2	384312
10 mm	10 mm	G 1/4	17.0	24.0	14.9	7.0	17.0	42.3 g	921X4M-10FF-1/4	384313
10 mm	10 mm	G 3/8	17.0	24.9	15.3	8.0	19.0	50.4 g	921X4M-10FF-3/8	384314
10 mm	10 mm	G 1/2	17.0	24.9	16.3	9.0	24.0	71.8 g	921X4M-10FF-1/2	384315
12 mm	12 mm	G 3/8	20.5	26.8	17.0	8.0	19.0	67.7 g	921X4M-12FF-3/8	384317
16 mm	16 mm	G 1/2	20.5	26.8	18.0	9.0	24.0	89.1 g	921X4M-12FF-1/2	384318

T-adaptor, male

PN 20 | Seal: FKM | Medium temperature: 0 °C – 120 °C | Thread type: conical



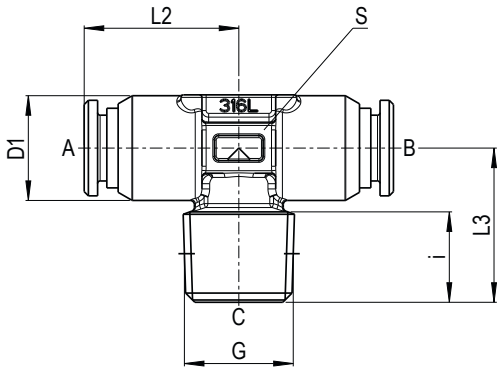


A	B	C	Ø D1 mm	L2 mm	L3 mm	i mm	S mm	Weight	Type	Order No.
4 mm	4 mm	R 1/8	10.5	16.8	14.4	7.5	8.0	13.2 g	941X4M-4FF-1/8K	384203
4 mm	4 mm	R 1/4	10.5	16.8	17.4	10.5	8.0	17.6 g	941X4M-4FF-1/4K	384204
6 mm	6 mm	R 1/4	12.5	18.5	18.4	10.5	9.0	21.6 g	941X4M-6FF-1/4K	384206
6 mm	6 mm	R 1/8	12.5	18.4	15.4	7.5	8.0	20.3 g	941X4M-6FF-1/8K	385307
8 mm	8 mm	R 1/4	14.5	21.5	19.4	10.5	12.0	29.1 g	941X4M-8FF-1/4K	384208
8 mm	8 mm	R 3/8	14.5	21.4	19.9	11.0	12.0	33.4 g	941X4M-8FF-3/8K	384209
10 mm	10 mm	R 1/4	17.0	24.0	20.7	10.5	14.0	40.1 g	941X4M-10FF-1/4K	384210
8 mm	8 mm	R 1/8	14.5	20.2	16.4	7.5	12.0	29.2 g	941X4M-8FF-1/8K	385309
10 mm	10 mm	R 3/8	17.0	24.9	21.2	11.0	14.0	45.1 g	941X4M-10FF-3/8K	384211
10 mm	10 mm	R 1/2	17.0	24.9	24.2	14.0	14.0	55.3 g	941X4M-10FF-1/2K	384212
12 mm	12 mm	R 1/4	20.5	26.8	22.4	10.5	17.0	60.1 g	941X4M-12FF-1/4K	384213
12 mm	12 mm	R 3/8	20.5	27.8	22.9	11.0	17.0	61.5 g	941X4M-12FF-3/8K	384214

Y-connector

PN 20 | Seal: FKM | Medium temperature: 0 °C – 120 °C



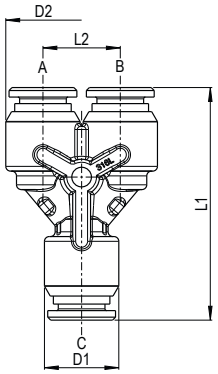


A	B	C	Ø D1 mm	Ø D2 mm	L1 mm	L2 mm	Weight	Type	Order No.
6 mm	6 mm	6 mm	12.5	12.5	39.1	13.0	23.8 g	982X4M-6FF	384505
8 mm	8 mm	8 mm	14.5	14.5	45.5	15.5	34.5 g	982X4M-8FF	384507
10 mm	10 mm	8 mm	17.0	17.0	54.1	18.0	56.8 g	982X4M-8-10FF	384508
10 mm	10 mm	10 mm	17.0	17.0	51.8	18.0	51.0 g	982X4M-10FF	384509
12 mm	12 mm	12 mm	20.5	20.5	57.2	21.5	87.1 g	982X4M-12FF	384511

Straight bulkhead connector

PN 20 | Seal: FKM | Medium temperature: 0 °C – 120 °C



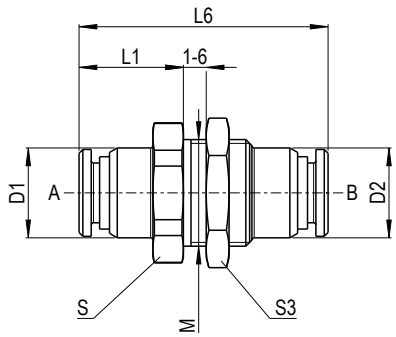


A	B	Ø D1 mm	Ø D2 mm	L1 mm	L6 mm	S mm	S3 mm	M	Weight	Type	Order No.
4 mm	4 mm	9.8	9.8	12.3	31.1	14.0	17.0	M12x1	16.8 g	959X4-4FF	383429
6 mm	6 mm	11.8	11.8	13.7	32.7	17.0	17.0	M14x1	22.0 g	959X4-6FF	383435
8 mm	8 mm	13.8	13.8	16.5	36.7	19.0	19.0	M16x1	27.5 g	959X4-8FF	383437
10 mm	10 mm	16.4	16.4	20.8	41.9	22.0	24.0	M20x1	50.6 g	959X4-10FF	383439

Straight bulkhead adaptor, female

PN 20 | Seal: FKM | Medium temperature: 0 °C – 120 °C | Thread type: cylindrical



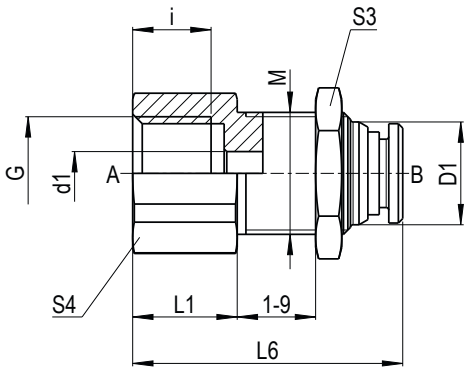

A	B	Ø D1 mm	Ø D2 mm	L1 mm	L6 mm	i mm	S3 mm	S4 mm	M	Weight	Type	Order No.
G 1/8	4 mm	9.8	3.0	6.5	25.3	7.0	17.0	14.0	M12x1	16.9 g	945X4-4FF-1/8	383606
G 1/8	6 mm	11.8	5.0	6.5	25.5	7.0	17.0	17.0	M14x1	24.2 g	945X4-6FF-1/8	383612
G 1/4	6 mm	11.8	5.0	12.0	31.0	9.0	17.0	17.0	M14x1	29.6 g	945X4-6FF-1/4	383613
G 1/8	8 mm	13.8	7.0	7.0	27.2	7.0	19.0	19.0	M16x1	33.0 g	945X4-8FF-1/8	383616
G 1/4	8 mm	13.8	7.0	9.5	29.7	9.0	19.0	19.0	M16x1	30.3 g	945X4-8FF-1/4	383617
G 3/8	10 mm	16.4	9.0	13.0	34.1	10.0	24.0	22.0	M20x1	57.7 g	945X4-10FF-3/8	385367
G 3/8	12 mm	19.8	10.0	13.2	36.0	10.0	27.0	24.0	M22x1,5	77.7 g	945X4-12FF-3/8	385366
G 1/2	12 mm	19.8	10.0	16.7	39.5	13.0	27.0	24.0	M22x1,5	74.4 g	945X4-12FF-1/2	385365