ACCESSORIES & AIR GUNS DISTRIBUTION MANIFOLDS

PLUS

AVAILABLE IN TWO DIFFERENT MATERIALS DEPENDING ON APPLICATIONS

LIGHT AND COMPACT ALLUMINIUM MANIFOLDS, AVAILABLE IN SEVERAL VERSIONS

STRONG AND SUITABLE STAINLESS STEEL COLLECTORS FOR INDUSTRIAL APPLICATIONS

DISTRIBUTION MANIFOLDS / ALUMINIUM



p. 438 / **4100**



p. 438 / **4150**




p. 439 / **4200**

DISTRIBUTION MANIFOLDS / STAINLESS STEEL AISI 304



p. 440 / **4150TRX**

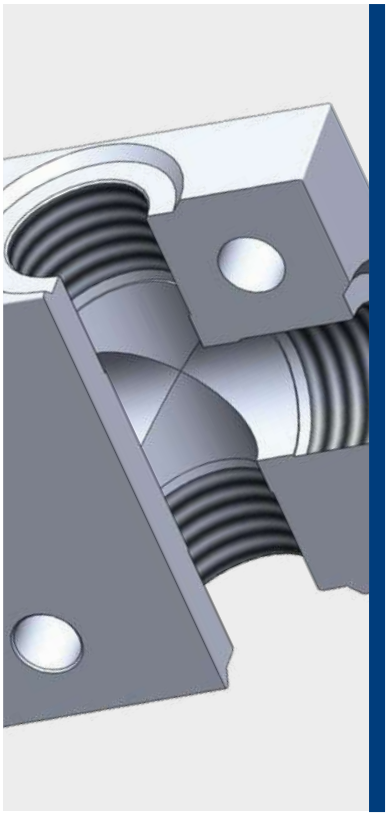

-10°C ÷ 80°C

Working pressure:
20 Bar

Compressed air and fluids suitable with construction materials

- Parallel gas BSPP ISO 228 from G1/8" to G1/2"
- Metric ISO 262 M5


Body: Anodized aluminium (4100)
Aluminium (4150 and 4200)

AVAILABILITY:
Customized manifolds available on request

Products in compliance with EC Regulation 1907/2006

Products in compliance with the directive EU 2015/863


CONSTRUCTION DETAILS

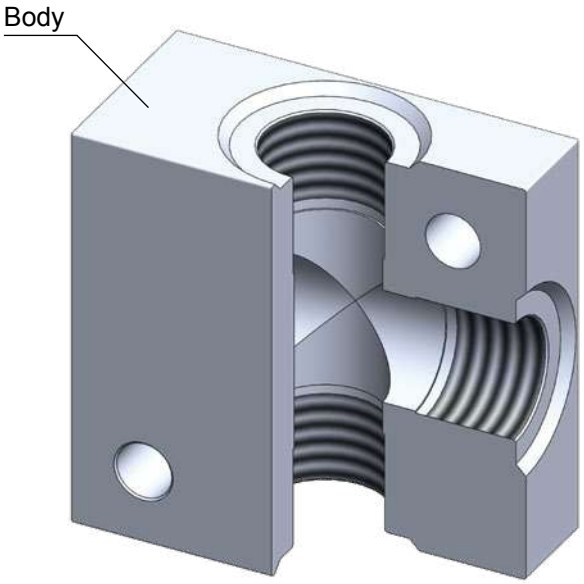

4100

Anodized aluminium cross manifold






CODE	A	B	C	D	E	g
4100TR18-A	G 1/8"	25,0	15,0	4,5	17,0	17,5
4100TR14-A	G 1/4"	40,0	20,0	5,5	26,0	60,0
4100TR38	G 3/8"	40,0	25,0	5,5	26,0	70,0
4100TR38-A	G 3/8"	50,0	25,0	5,5	34,0	95,0
4100TR12-A	G 1/2"	50,0	30,0	5,5	34,0	129,0

4150

Aluminium distribution manifold with single outputs



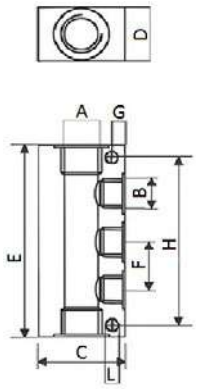


CODE	A	B	C	D	E	F	G	H	L	g
4150TR18M52	G 1/8"	M5-2	25,0	15,0	45,0	15,0	3,5	33,0	4,5	38,0
4150TR18M53	G 1/8"	M5-3	25,0	15,0	60,0	15,0	3,5	48,0	4,5	50,0
4150TR18M54	G 1/8"	M5-4	25,0	15,0	75,0	15,0	3,5	63,0	4,5	64,0
4150TR18M55	G 1/8"	M5-5	25,0	15,0	90,0	15,0	3,5	78,0	4,5	79,0
4150TR18M56	G 1/8"	M5-6	25,0	15,0	105,0	15,0	3,5	93,0	4,5	90,0
4150TR14182	G 1/4"	G 1/8"-2	30,0	20,0	54,0	18,0	4,5	45,0	4,5	64,0
4150TR14183	G 1/4"	G 1/8"-3	30,0	20,0	72,0	18,0	4,5	63,0	4,5	86,0
4150TR14184	G 1/4"	G 1/8"-4	30,0	20,0	90,0	18,0	4,5	81,0	4,5	110,0
4150TR14185	G 1/4"	G 1/8"-5	30,0	20,0	108,0	18,0	4,5	99,0	4,5	130,0
4150TR14186	G 1/4"	G 1/8"-6	30,0	20,0	126,0	18,0	4,5	117,0	4,5	154,0
4150TR38142	G 3/8"	G 1/4"-2	40,0	25,0	68,0	24,0	6,0	51,0	5,5	136,0
4150TR38143	G 3/8"	G 1/4"-3	40,0	25,0	92,0	24,0	6,0	75,0	5,5	184,0
4150TR38144	G 3/8"	G 1/4"-4	40,0	25,0	116,0	24,0	6,0	99,0	5,5	238,0
4150TR38145	G 3/8"	G 1/4"-5	40,0	25,0	140,0	24,0	6,0	123,0	5,5	298,0
4150TR38146	G 3/8"	G 1/4"-6	40,0	25,0	164,0	24,0	6,0	147,0	5,5	338,0
4150TR12382	G 1/2"	G 3/8"-2	50,0	30,0	78,0	26,0	6,5	59,0	5,5	228,0
4150TR12383	G 1/2"	G 3/8"-3	50,0	30,0	104,0	26,0	6,5	85,0	5,5	304,0
4150TR12384	G 1/2"	G 3/8"-4	50,0	30,0	130,0	26,0	6,5	111,0	5,5	380,0
4150TR12385	G 1/2"	G 3/8"-5	50,0	30,0	156,0	26,0	6,5	137,0	5,5	456,0
4150TR12386	G 1/2"	G 3/8"-6	50,0	30,0	182,0	26,0	6,5	163,0	5,5	530,0
4150TR12122	G 1/2"	G 1/2"-2	50,0	30,0	102,0	34,0	6,5	83,0	5,5	292,0
4150TR12123	G 1/2"	G 1/2"-3	50,0	30,0	136,0	34,0	6,5	117,0	5,5	392,0
4150TR12124	G 1/2"	G 1/2"-4	50,0	30,0	170,0	34,0	6,5	151,0	5,5	488,0
4150TR12125	G 1/2"	G 1/2"-5	50,0	30,0	204,0	34,0	6,5	185,0	5,5	584,0
4150TR12126	G 1/2"	G 1/2"-6	50,0	30,0	238,0	34,0	6,5	219,0	5,5	682,0

drawings and technical data are not binding & can be changed without notice

4200

Aluminium distribution manifold with double outputs



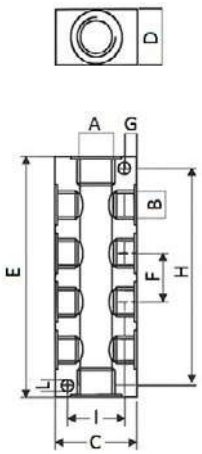

CODE	A	B	C	D	E	F	G	H	L	I	g
4200TR18M522	G 1/8"	M5-2+2	25,0	15,0	45,0	15,0	3,5	33,0	4,5	18,0	37,0
4200TR18M533	G 1/8"	M5-3+3	25,0	15,0	60,0	15,0	3,5	48,0	4,5	18,0	50,0
4200TR18M544	G 1/8"	M5-4+4	25,0	15,0	75,0	15,0	3,5	63,0	4,5	18,0	62,0
4200TR18M555	G 1/8"	M5-5+5	25,0	15,0	90,0	15,0	3,5	78,0	4,5	18,0	74,0
4200TR18M566	G 1/8"	M5-6+6	25,0	15,0	105,0	15,0	3,5	93,0	4,5	18,0	98,0
4200TR141822	G 1/4"	G 1/8"-2+2	30,0	20,0	54,0	18,0	4,5	45,0	4,5	21,0	60,0
4200TR141833	G 1/4"	G 1/8"-3+3	30,0	20,0	72,0	18,0	4,5	63,0	4,5	21,0	81,0
4200TR141844	G 1/4"	G 1/8"-4+4	30,0	20,0	90,0	18,0	4,5	81,0	4,5	21,0	100,0
4200TR141855	G 1/4"	G 1/8"-5+5	30,0	20,0	108,0	18,0	4,5	99,0	4,5	21,0	122,0
4200TR141866	G 1/4"	G 1/8"-6+6	30,0	20,0	126,0	18,0	4,5	117,0	4,5	21,0	142,0
4200TR381422	G 3/8"	G 1/4"-2+2	40,0	25,0	68,0	24,0	6	51,0	5,5	28,0	127,0
4200TR381433	G 3/8"	G 1/4"-3+3	40,0	25,0	92,0	24,0	6	75,0	5,5	28,0	170,0
4200TR381444	G 3/8"	G 1/4"-4+4	40,0	25,0	116,0	24,0	6	99,0	5,5	28,0	216,0
4200TR381455	G 3/8"	G 1/4"-5+5	40,0	25,0	140,0	24,0	6	123,0	5,5	28,0	266,0
4200TR381466	G 3/8"	G 1/4"-6+6	40,0	25,0	164,0	24,0	6	147,0	5,5	28,0	312,0
4200TR123822	G 1/2"	G 3/8"-2+2	50,0	30,0	78,0	26,0	6,5	59,0	5,5	37,0	210,0
4200TR123833	G 1/2"	G 3/8"-3+3	50,0	30,0	104,0	26,0	6,5	85,0	5,5	37,0	278,0
4200TR123844	G 1/2"	G 3/8"-4+4	50,0	30,0	130,0	26,0	6,5	111,0	5,5	37,0	344,0
4200TR123855	G 1/2"	G 3/8"-5+5	50,0	30,0	156,0	26,0	6,5	137,0	5,5	37,0	412,0
4200TR123866	G 1/2"	G 3/8"-6+6	50,0	30,0	182,0	26,0	6,5	163,0	5,5	37,0	478,0
4200TR121222	G 1/2"	G 1/2"-2+2	50,0	30,0	102,0	34,0	6,5	83,0	5,5	37,0	268,0
4200TR121233	G 1/2"	G 1/2"-3+3	50,0	30,0	136,0	34,0	6,5	117,0	5,5	37,0	348,0
4200TR121244	G 1/2"	G 1/2"-4+4	50,0	30,0	170,0	34,0	6,5	151,0	5,5	37,0	430,0
4200TR121255	G 1/2"	G 1/2"-5+5	50,0	30,0	204,0	34,0	6,5	185,0	5,5	37,0	512,0
4200TR121266	G 1/2"	G 1/2"-6+6	50,0	30,0	238,0	34,0	6,5	219,0	5,5	37,0	596,0



-25°C ÷ 100°C
Below 0°C in the presence of water with antifreeze glycol

Working pressure:
Up to 25 Bar

Compressed air, water, oil and fluids suitable with construction materials

Inlet thread:
Parallel gas BSPP ISO 228
from G1-1/2" to G2"
Outlet thread:
Taper gas BSPT ISO 7
R3/4"
Pressure Gauge thread:
Parallel gas BSPP ISO 228
G1/2"

Body: Stainless steel AISI 304 with treatment of electropolishing


Products in compliance with EC Regulation 1907/2006

Products in compliance with the directive EU 2015/863

4150TRX

Stainless steel AISI 304 distribution manifold



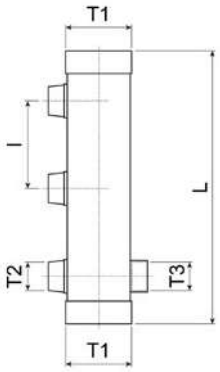

CODE	T1	T2	T3	I	L	N°HOLES
4150TRX112344	G 1-1/2"	R 3/4"	G 1/2"	70,0	291,0	4
4150TRX112345	G 1-1/2"	R 3/4"	G 1/2"	70,0	361,0	5
4150TRX112346	G 1-1/2"	R 3/4"	G 1/2"	70,0	431,0	6
4150TRX112347	G 1-1/2"	R 3/4"	G 1/2"	70,0	501,0	7
4150TRX112348	G 1-1/2"	R 3/4"	G 1/2"	70,0	571,0	8
4150TRX112349	G 1-1/2"	R 3/4"	G 1/2"	70,0	641,0	9
4150TRX1123410	G 1-1/2"	R 3/4"	G 1/2"	70,0	711,0	10
4150TRX1123411	G 1-1/2"	R 3/4"	G 1/2"	70,0	781,0	11
4150TRX1123412	G 1-1/2"	R 3/4"	G 1/2"	70,0	851,0	12
4150TRX1123413	G 1-1/2"	R 3/4"	G 1/2"	70,0	921,0	13
4150TRX1123414	G 1-1/2"	R 3/4"	G 1/2"	70,0	991,0	14
4150TRX2344	G 2"	R 3/4"	G 1/2"	70,0	299,0	4
4150TRX2345	G 2"	R 3/4"	G 1/2"	70,0	369,0	5
4150TRX2346	G 2"	R 3/4"	G 1/2"	70,0	439,0	6
4150TRX2347	G 2"	R 3/4"	G 1/2"	70,0	509,0	7
4150TRX2348	G 2"	R 3/4"	G 1/2"	70,0	579,0	8
4150TRX2349	G 2"	R 3/4"	G 1/2"	70,0	649,0	9
4150TRX23410	G 2"	R 3/4"	G 1/2"	70,0	719,0	10
4150TRX23411	G 2"	R 3/4"	G 1/2"	70,0	789,0	11
4150TRX23412	G 2"	R 3/4"	G 1/2"	70,0	859,0	12
4150TRX23413	G 2"	R 3/4"	G 1/2"	70,0	929,0	13
4150TRX23414	G 2"	R 3/4"	G 1/2"	70,0	999,0	14

T1 & T3: Female thread
T2: Male thread

drawings and technical data are not binding & can be changed without notice