
ART.	DESCR.	APPLICAZIONE	NOTE
 **12209N**	Three pole plug connector UNI ISO 4400 (DIN 43650 B) - IP65 *Connettore tripolare UNI ISO 4400 (DIN 43650 B) - IP65*	On all products *Su tutti i prodotti*	Including screw and seal *Include la vite e la guarnizione*
 **18209N**	Three pole plug connector UNI ISO 4400 (DIN 43650 A) - IP65 *Connettore tripolare UNI ISO 4400 (DIN 43650 A) - IP65*	On all products *Su tutti i prodotti*	Including screw and seal *Include la vite e la guarnizione*
 **801022**	Pump support / vibration absorber *Supporto pompa / antivibrante*	CEME ULKA E series	-
 **801045**	Pump support / vibration absorber *Supporto pompa / antivibrante*	CEME ULKA HF series	-
 **801017**	Pump support / vibration absorber *Supporto pompa / antivibrante*	CEME ULKA E series	-
 **801039**	Pump support / vibration absorber *Supporto pompa / antivibrante*	CEME ULKA E series	-
 **10413**	Pump support / vibration absorber STANDARD *Supporto pompa / antivibrante STANDARD*	CEME E400 series / E503, E507, E509, E512, E514	-
 **103301**	Pump support / vibration absorber STANDARD *Supporto pompa / antivibrante STANDARD*	CEME E400 series /E503, E507, E509, E512, E514	-
 **10019**	Pump support / vibration absorber *Supporto pompa / antivibrante*	E503, E507, E509, E512, E514	G 1/4" and NPT 1/8"

PUMP'S BRACKET



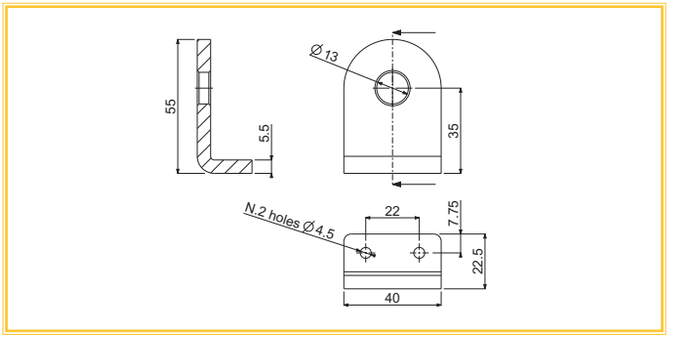

CODE:


P992454

FEATURES:

Bracket for PX and P series pumps made of black NBR

THERMAL PROTECTOR



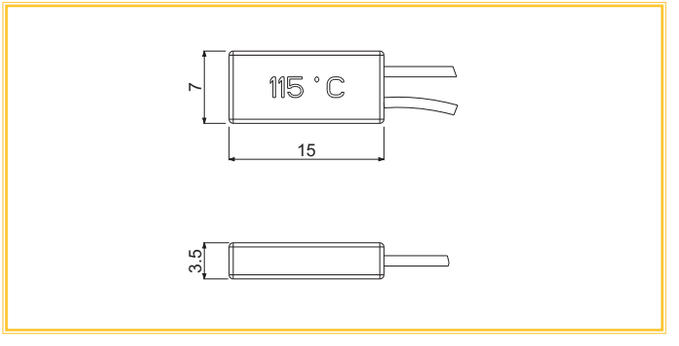

CODE:

P992215

FEATURES:

› Switching Capacity: 250V/50 Hz | 5 A
› Minimum current: 50 mA
› 10.000 cycles 24 VDC | 10A
› Switching Temperature: 115°C (± 5K)
› Switching Differential: 10 - 50 k (± 15K)
› Max. ambient temperature: 160 °C
› Silicon wires 0.5 mm^2 lenght 70 mm, tinned and self-extinguishing
› Approvals: UL, VDE