

Pneumatic - Spring

Ordering code


261A.52.00.19

CONNECTIONS

1 = G3/8"


5 = G1/4"

8 = quick fitting tube Ø10

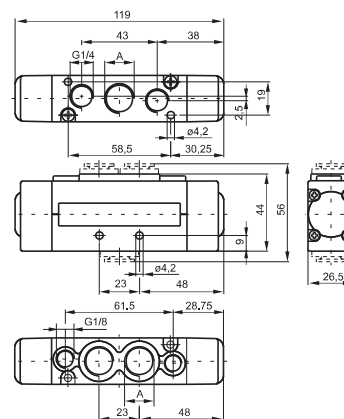

For dimension "A" see ordering code

Weight gr. 235
Minimum piloting pressure 2 bar



Operational characteristic

Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Orifice size (mm)	Working ports size	Pilot ports size
		Min.	Max.				
Filtered and lubricated air or not	10 bar	-5°C	+50°C	1500 NI/min	mm 9	G1/4" - G3/8" tube Ø10	G1/8"

Pneumatic - Differential / Differential external

Ordering code

261A.52.00.V

CONNECTIONS

1 = G3/8"


5 = G1/4"

8 = quick fitting tube Ø10

VERSION


16 = Pneum. - Diff./al

17 = Pneum. - Diff./al ext.

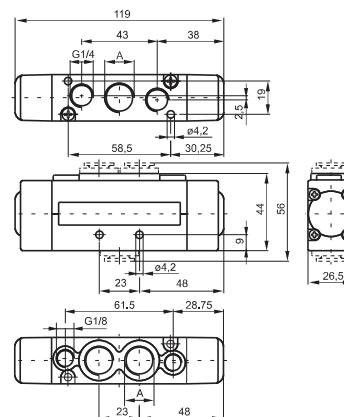

For dimension "A" see ordering code

Weight gr. 235
Minimum piloting pressure 2 bar



Operational characteristic

Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Orifice size (mm)	Working ports size	Pilot ports size
		Min.	Max.				
Filtered and lubricated air or not	10 bar	-5°C	+50°C	1500 NI/min	mm 9	G1/4" - G3/8" tube Ø10	G1/8"

Pneumatic - Pneumatic

Ordering code


261A.52.00.18

CONNECTIONS

1 = G3/8"

5 = G1/4"

8 = quick fitting tube Ø10

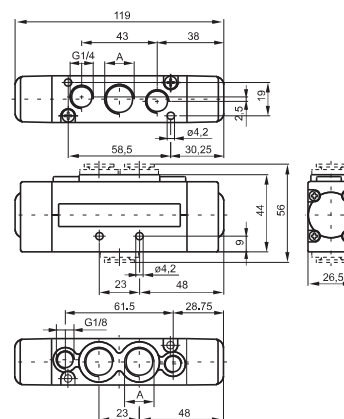

For dimension "A" see ordering code

Weight gr. 235
Minimum piloting pressure 1,5 bar



Operational characteristic

Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Orifice size (mm)	Working ports size	Pilot ports size
		Min.	Max.				
Filtered and lubricated air or not	10 bar	-5°C	+50°C	1500 NI/min	mm 9	G1/4" - G3/8" tube Ø10	G1/8"

Miniature solenoid - Spring / Differential

Ordering code

261A.52.00.V.T

CONNECTIONS

A1 = G3/8"

5 = G1/4"

8 = quick fitting tube Ø10

VERSION

39 = Sv. - Spring

V29 = Sv. ext. - Spring

36 = Sv. - Diff./al

37 = Sv. ext. - Diff./al ext.

26 = Sv. ext. - Diff./al

27 = Sv. ext. - Diff./al ext.

COIL VOLTAGE

01 = 12V DC

02 = 24V DC

05 = 24V AC

06 = 110V AC

07 = 220V AC

08 = 24V DC 1 Watt

T09 = 24V DC Earth Faston

11 = 12V DC Downward

12 = 24V DC Downward

15 = 24V AC Downward


16 = 110V AC Downward

17 = 220V AC Downward

18 = 24V DC 1 Watt Downward

19 = 24V DC Earth Faston Downward



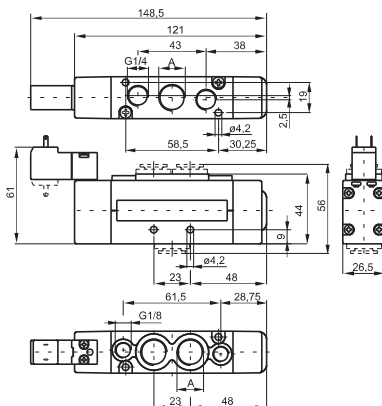

Weight gr. 275

Minimum working pressure 2 bar - For dimension "A" see ordering code



Operational characteristic	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size
	Filtered and lubricated air or not	10 bar	Min. -5°C	Max. +50°C	1500 NI/min	mm 9	G1/4" - G3/8" tube Ø10

Miniature solenoid - Miniature solenoid

Ordering code

261A.52.00.V.T

CONNECTIONS

A1 = G3/8"

5 = G1/4"

8 = quick fitting tube Ø10

VERSION

V35 = Sv. - Sv.

24 = Sv. ext. - Sv. ext.

COIL VOLTAGE

01 = 12V DC

02 = 24V DC

05 = 24V AC

06 = 110V AC

07 = 220V AC

08 = 24V DC 1 Watt

T09 = 24V DC Earth Faston

11 = 12V DC Downward

12 = 24V DC Downward

15 = 24V AC Downward


16 = 110V AC Downward

17 = 220V AC Downward

18 = 24V DC 1 Watt Downward

19 = 24V DC Earth Faston Downward



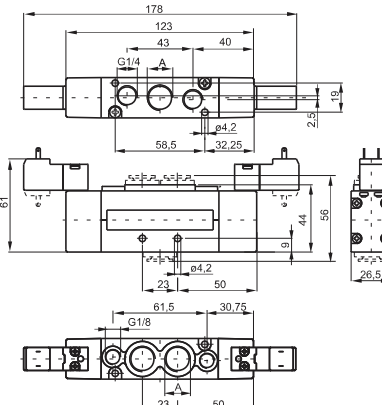

Weight gr. 295

Minimum working pressure 1,5 bar - For dimension "A" see ordering code



Operational characteristic	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size
	Filtered and lubricated air or not	10 bar	Min. -5°C	Max. +50°C	1500 NI/min	mm 9	G1/4" - G3/8" tube Ø10

Specifications may be subject to change without prior notice

2.170

Pneumatic - Pneumatic

Ordering code

261A.53.F.18

CONNECTIONS

1 = G3/8"

5 = G1/4"


8 = quick fitting tube Ø10

FUNCTION


31 = Closed centres

32 = Open centres

33 = Pressured centres

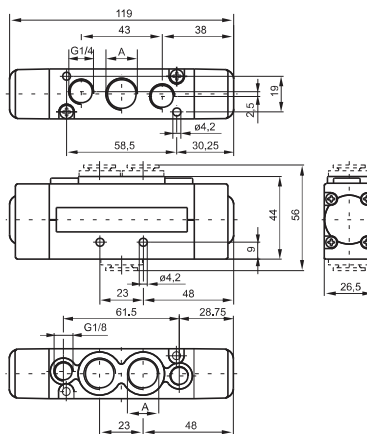

Weight gr. 245 - Minimum working pressure 3 bar



For dimension "A" see ordering code

Operational characteristic

Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Orifice size (mm)	Working ports size	Pilot ports size
Filtered and lubricated air or not	10 bar	Min. -5°C Max. +50°C	1350 NI/min	mm 9	G1/8"-G1/4" tube Ø6-tube Ø8	M5

Miniature solenoid - Miniature solenoid

Ordering code

261A.53.F.V.T

CONNECTIONS

1 = G3/8"

5 = G1/4"

8 = quick fitting tube Ø10

FUNCTION

31 = Closed centres

32 = Open centres

33 = Pressured centres

VERSION

24 = Sv. ext. - Sv. ext.

35 = Sv. - Sv.

COIL VOLTAGE

01 = 12V DC

02 = 24V DC

05 = 24V AC

06 = 110V AC

07 = 220V AC

08 = 24V DC 1 Watt

09 = 24V DC Earth Faston

11 = 12V DC Downward

12 = 24V DC Downward


15 = 24V AC Downward

16 = 110V AC Downward




17 = 220V AC Downward

18 = 24V DC 1 Watt Downward

19 = 24V DC Earth Faston Downward

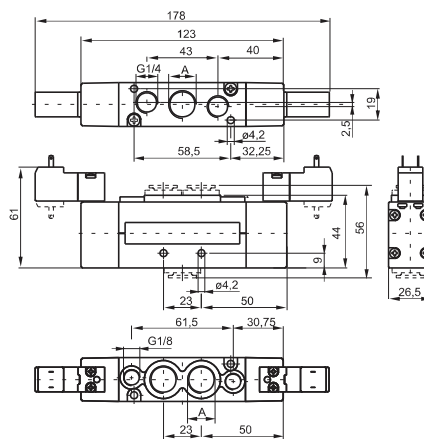

Weight gr. 245 - Minimum working pressure 3 bar



For dimension "A" see ordering code

Operational characteristic

Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Orifice size (mm)	Working ports size
Filtered and lubricated air or not	10 bar	Min. -5°C Max. +50°C	1350 NI/min	mm 9	G1/8"-G1/4" tube Ø6-tube Ø8

Pneumatic - Spring

Ordering code

263A.52.00.19


CONNECTIONS

A1 = G3/8"


5 = G1/4"

8 = quick fitting tube Ø10



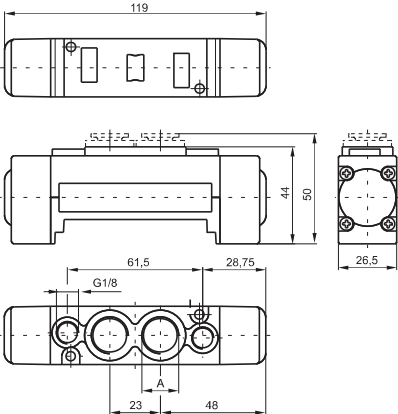

Weight gr. 185
Minimum piloting pressure 2 bar



For dimension "A" see ordering code

Operational characteristic	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with Δp=1 (Nl/min)	Orifice size (mm)	Working ports size	Pilot ports size
	Filtered and lubricated air or not	10 bar	Min. -5°C	Max. +50°C	1500 Nl/min	mm 9	G1/4" - G3/8" tube Ø10	M5

Pneumatic - Differential / Differential external

Ordering code

263A.52.00.V

CONNECTIONS

A1 = G3/8"

5 = G1/4"


8 = quick fitting tube Ø10

VERSION



V16 = Pneum. - Diff./al

V17 = Pneum. - Diff./al ext.



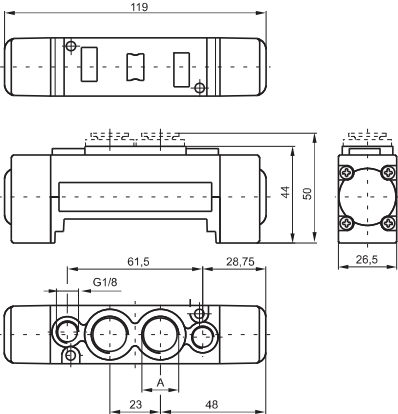

Weight gr. 185
Minimum piloting pressure 2 bar



For dimension "A" see ordering code

Operational characteristic	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with Δp=1 (Nl/min)	Orifice size (mm)	Working ports size	Pilot ports size
	Filtered and lubricated air or not	10 bar	Min. -5°C	Max. +50°C	1500 Nl/min	mm 9	G1/4" - G3/8" tube Ø10	M5

Pneumatic - Pneumatic

Ordering code

263A.52.00.18


CONNECTIONS

A1 = G3/8"


5 = G1/4"

8 = quick fitting tube Ø10



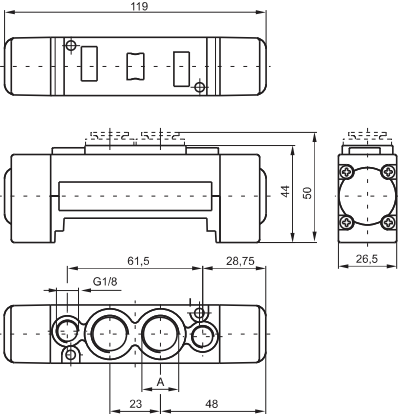

Weight gr. 185
Minimum piloting pressure 1,5 bar



For dimension "A" see ordering code

Operational characteristic	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with Δp=1 (Nl/min)	Orifice size (mm)	Working ports size	Pilot ports size
	Filtered and lubricated air or not	10 bar	Min. -5°C	Max. +50°C	1500 Nl/min	mm 9	G1/4" - G3/8" tube Ø10	M5

Miniature solenoid - Spring / Differential

Ordering code

263A.52.00.V.T

CONNECTIONS


- 1 = G3/8"
- 5 = G1/4"
- 8 = quick fitting tube Ø10

VERSION

- 39 = Sv. - Spring
- 29 = Sv. ext. - Spring
- 36 = Sv. - Diff./al
- 37 = Sv. ext. - Diff./al ext.
- 26 = Sv. ext. - Diff./al
- 27 = Sv. ext. - Diff./al ext.



COIL VOLTAGE

- 01 = 12V DC
- 02 = 24V DC
- 05 = 24V AC
- 06 = 110V AC
- 07 = 220V AC
- 08 = 24V DC 1 Watt
- 09 = 24V DC Earth Faston
- 11 = 12V DC Downward
- 12 = 24V DC Downward
- 15 = 24V AC Downward
- 16 = 110V AC Downward
- 17 = 220V AC Downward
- 18 = 24V DC 1 Watt Downward
- 19 = 24V DC Earth Faston Downward

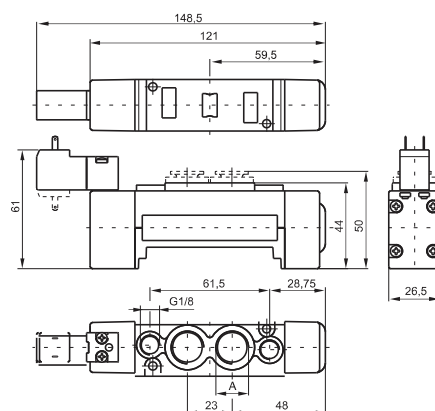

Weight gr. 220

Minimum working pressure 2 bar - For dimension "A" see ordering code



Operational characteristic

Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size
Filtered and lubricated air or not	10 bar	Min. -5°C Max. +50°C	1500 NI/min	mm 9	G1/4" - G3/8" tube Ø10

Miniature solenoid - Miniature solenoid

Ordering code

263A.52.00.V.T

CONNECTIONS


- 1 = G3/8"
- 5 = G1/4"
- 8 = quick fitting tube Ø10

VERSION

- 35 = Sv. - Sv.
- 24 = Sv. ext. - Sv. ext.

COIL VOLTAGE

- 01 = 12V DC
- 02 = 24V DC
- 05 = 24V AC
- 06 = 110V AC
- 07 = 220V AC
- 08 = 24V DC 1 Watt
- 09 = 24V DC Earth Faston
- 11 = 12V DC Downward
- 12 = 24V DC Downward
- 15 = 24V AC Downward
- 16 = 110V AC Downward
- 17 = 220V AC Downward
- 18 = 24V DC 1 Watt Downward
- 19 = 24V DC Earth Faston Downward

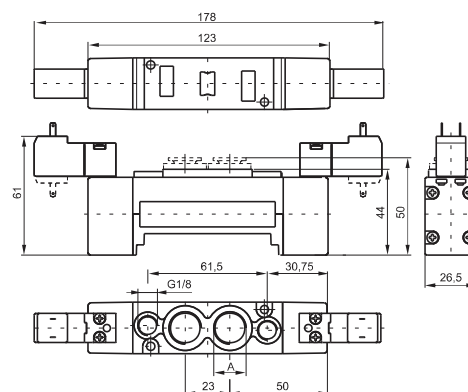

Weight gr. 250

Minimum working pressure 1,5 bar - For dimension "A" see ordering code



Operational characteristic

Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size
Filtered and lubricated air or not	10 bar	Min. -5°C Max. +50°C	1500 NI/min	mm 9	G1/4" - G3/8" tube Ø10



2

Pneumatic - Pneumatic

Ordering code

263A.53.F.18

CONNECTIONS

A1 = G3/8"

5 = G1/4"


8 = quick fitting tube Ø10

FUNCTION




F31 = Closed centres

32 = Open centres

33 = Pressured centres

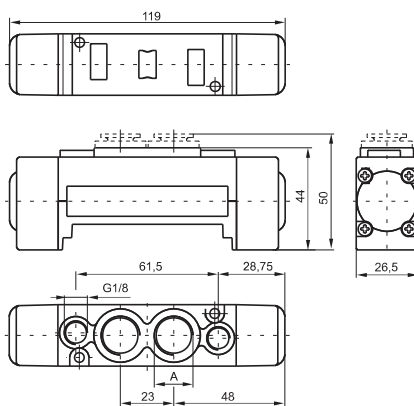

Weight gr. 195 - Minimum working pressure 3 bar



For dimension "A" see ordering code

Operational characteristic	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size	Pilot ports size
	Filtered and lubricated air or not	10 bar	Min. -5°C	Max. +50°C	1350 NI/min	mm 9	G1/8"-G1/4" tube Ø6-tube Ø8	M5

Miniature solenoid - Miniature solenoid

Ordering code

263A.53.F.V.T

CONNECTIONS

A1 = G3/8"

5 = G1/4"

8 = quick fitting tube Ø10

FUNCTION

F31 = Closed centres

32 = Open centres

33 = Pressured centres

VERSION

V24 = Sv. ext. - Sv. ext.

35 = Sv. - Sv.

COIL VOLTAGE

01 = 12V DC

02 = 24V DC

05 = 24V AC

06 = 110V AC

07 = 220V AC

08 = 24V DC 1 Watt

T09 = 24V DC Earth Faston

11 = 12V DC Downward

12 = 24V DC Downward


15 = 24V AC Downward

16 = 110V AC Downward




17 = 220V AC Downward

18 = 24V DC 1 Watt Downward

19 = 24V DC Earth Faston Downward

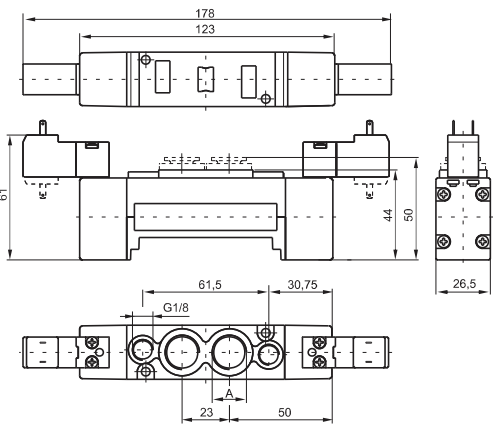

Weight gr. 270 - Minimum working pressure 3 bar




For dimension "A" see ordering code

Operational characteristic	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size
	Filtered and lubricated air or not	10 bar	Min. -5°C	Max. +50°C	1350 NI/min	mm 9	G1/8"-G1/4" tube Ø6-tube Ø8

Specifications may be subject to change without prior notice

2.174

Modular base

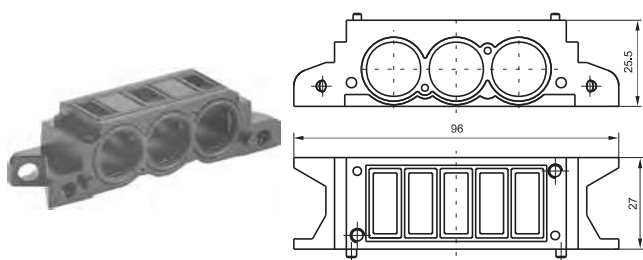


Ordering code

2630.01

Weight gr. 80

Right inlet base

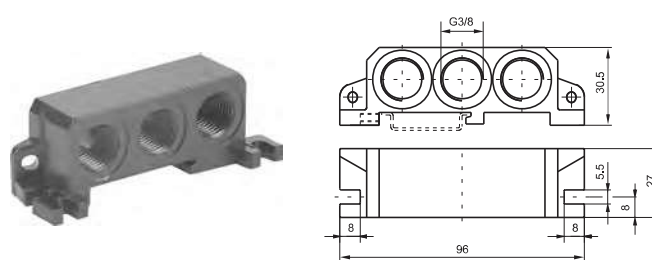


Ordering code

2630.02

Weight gr. 80

Left inlet base

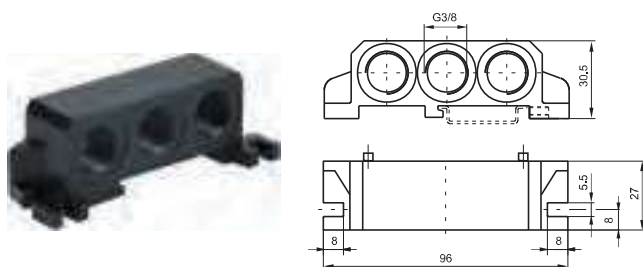


Ordering code

2630.03

Weight gr. 100

Intermediate air intake

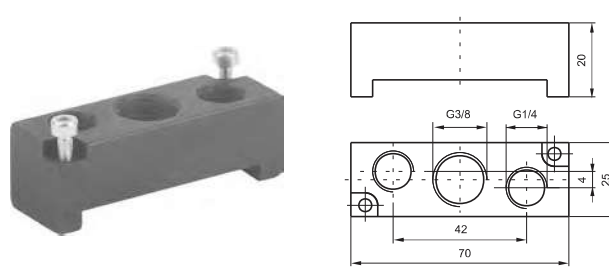


Ordering code

2630.10

Weight gr. 60
to be assembled of a valve

Closing plate

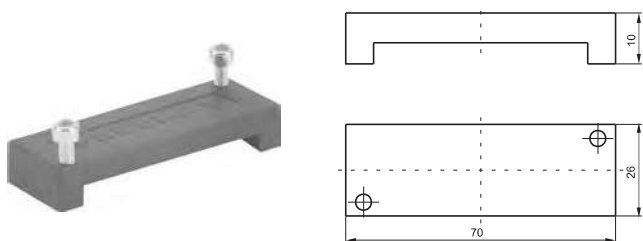

Ordering code

2630.00

Weight gr. 20

Diaphragm plug



Ordering code

2630.17


Weight gr. 5

Pneumatic - Spring

Ordering code

2645.52.00.19



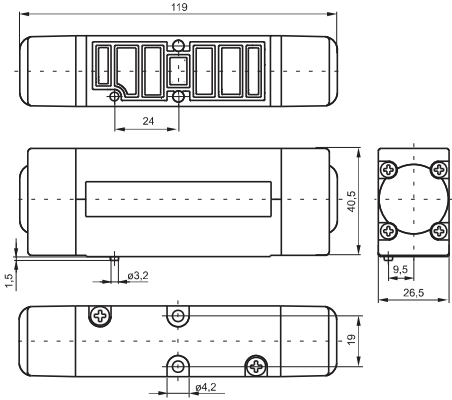



Weight gr. 235
Minimum piloting pressure 2 bar

Operational characteristic	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Orifice size (mm)
	Filtered and lubricated air or not	10 bar	Min. -5°C	Max. +50°C	1100 NI/min	mm 7,5

Pneumatic - Differential / Differential external


Ordering code

2645.52.00.V

VERSION

V 16 = Pneumatic - Differential
17 = Pneumatic - Differential external



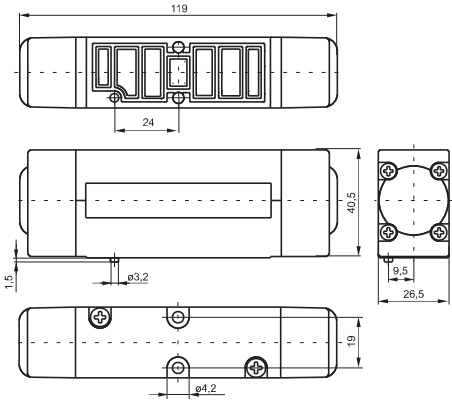



Weight gr. 235
Minimum piloting pressure 2 bar


Operational characteristic	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Orifice size (mm)
	Filtered and lubricated air or not	10 bar	Min. -5°C	Max. +50°C	1100 NI/min	mm 7,5

Pneumatic - Pneumatic

Ordering code

2645.52.00.18



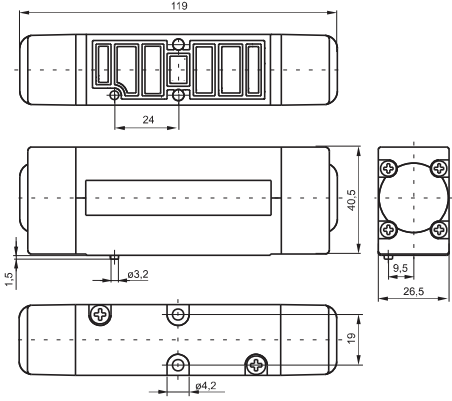



Weight gr. 255
Minimum piloting pressure 1,5 bar


Operational characteristic	Fluid	Max working pressure (bar)	Temperature °C		Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Orifice size (mm)
	Filtered and lubricated air or not	10 bar	Min. -5°C	Max. +50°C	1100 NI/min	mm 7,5

Miniature solenoid - Spring / Differential



Ordering code

264E.52.00.V.T

E	TYPE ELECTROPILOT EXHAUST 1 = on base (only for self feeding valves) 5 = on pilot (for all version)
V	VERSION 39 = Sv. - Spring 29 = Sv. ext. - Spring 36 = Sv. - Diff./al 37 = Sv. ext. - Diff./al ext. 26 = Sv. ext. - Diff./al 27 = Sv. ext. - Differ. ext.
T	COIL VOLTAGE 01 = 12V DC 02 = 24V DC 05 = 24V AC 06 = 110V AC 07 = 220V AC 08 = 24V DC 1 Watt 09 = 24V DC Earth Faston 11 = 12V DC Downward 12 = 24V DC Downward 15 = 24V AC Downward 16 = 110V AC Downward 17 = 220V AC Downward 18 = 24V DC 1 Watt Downward 19 = 24V DC Earth Faston Downward

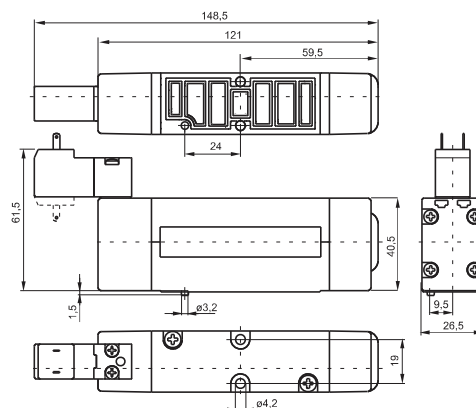

Miniature solenoid - Spring / Differenzial: Weight gr. 270 - Minimum working pressure 2 bar



Operational characteristic


Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)
Filtered and lubricated air or not	10 bar	Min. -5°C Max. +50°C	1100 NI/min	mm 7,5

Miniature solenoid - Miniature solenoid

Ordering code

264E.52.00.V.T

E	TYPE ELECTROPILOT EXHAUST 1 = on base (only for self feeding valves) 5 = on pilot (for all version)
V	VERSION 35 = Sv. - Sv. 24 = Sv. ext. - Sv. ext.
T	COIL VOLTAGE 01 = 12V DC 02 = 24V DC 05 = 24V AC 06 = 110V AC 07 = 220V AC 08 = 24V DC 1 Watt 09 = 24V DC Earth Faston 11 = 12V DC Downward 12 = 24V DC Downward 15 = 24V AC Downward 16 = 110V AC Downward 17 = 220V AC Downward 18 = 24V DC 1 Watt Downward 19 = 24V DC Earth Faston Downward

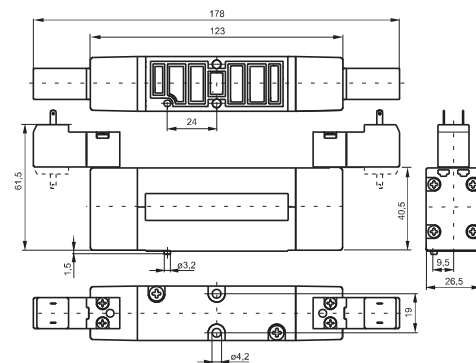

Miniature solenoid - Miniature solenoid: Weight gr. 305 - Minimum working pressure 1,5 bar



Operational characteristic

Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)
Filtered and lubricated air or not	10 bar	Min. -5°C Max. +50°C	1100 NI/min	mm 7,5

Modular base

Ordering code


2640.V

VERSION

01 = standard base


11 = for single
separate inlet

Weight gr. 220

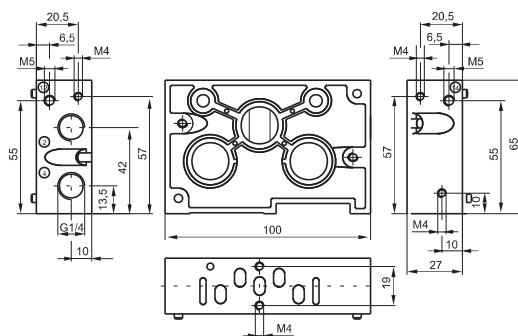

Right inlet base


Left inlet base

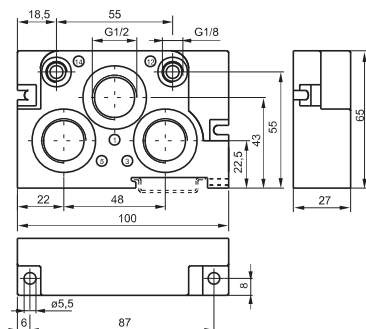

Ordering code

2640.02

Weight gr. 200

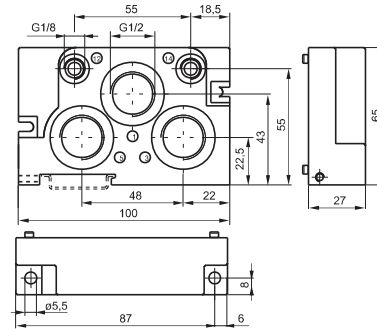

Ordering code

2640.03


Weight gr. 200

Intermediate air intake

Ordering code


2640.10

Weight gr. 380

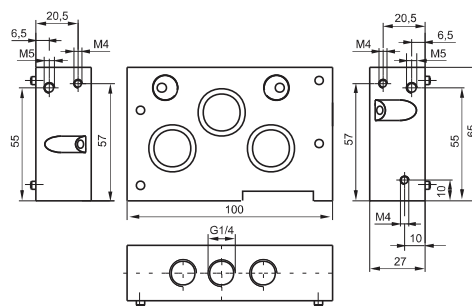

Closing plate

Diaphragm plug



Ordering code

2640.00

Weight gr. 50



Ordering code

2640.17

Weight gr. 10