




SERIES 3000 SOLENOID VALVES

QUALITY, DESIGN, LIGHTWEIGH AND PERFORMANCE


- Compact and clean design in 10mm thickness
- Manifold and stand alone versions available
- Complete range of valve functions
- Flow rate of 200 NI/min
- Multipole connection available
- Fieldbus connection available
- Complete range of serial protocols
- Complete range of input modules




SINGLE MOUNTING VERSION

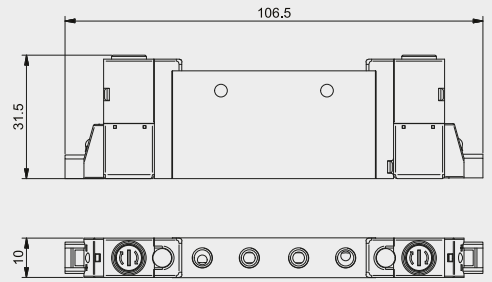


MANIFOLD VERSION

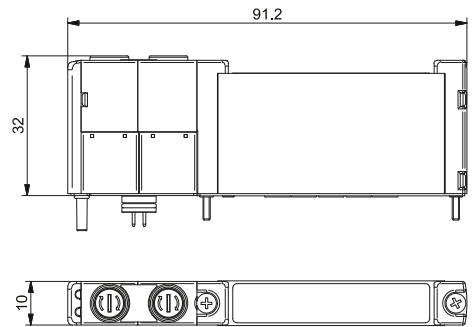

SERIAL BUS CONNECTION

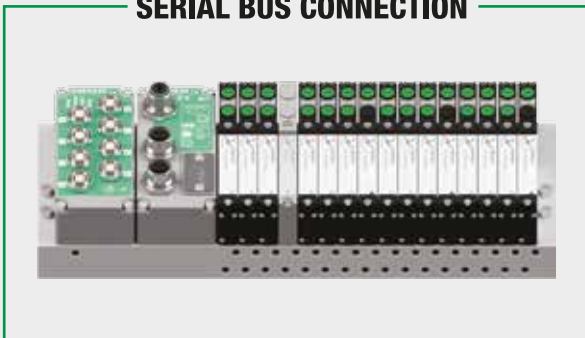

MULTIPOLE CONNECTION

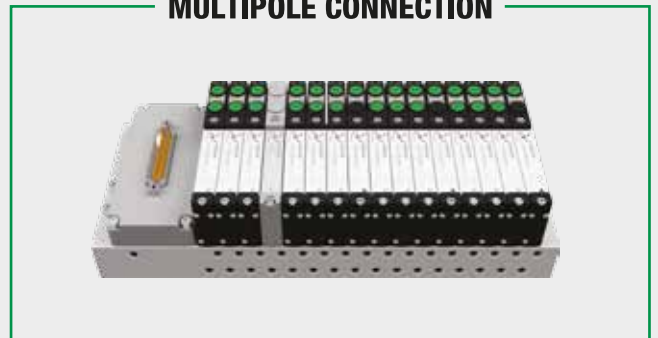

CanOpen

Devicenet

Profibus

Ethercat

Ethernet IP

Profinet

Powerlink

Modbus TCP

