



Overflow valve III° stage

S33C

PRESENTATION:

Stainless steel high sensitivity overflow valve suitable for the use with different types of fluids.

In the standard version the product is designed to operate with pressures up to 700 mbar.

The control of the inlet pressure is realized by means of a diaphragm.


USE: Compressed air and gas

CONNECTIONS: 1/2"
(DIN and ANSI flanged connections available on request)

OVERFLOW VALVE FEATURES:

Inlet pressure	5 ÷ 700 mbar
Operating temperature	- 20°C + 60°C
Kv nominal	0,64 m ³ /h (UNI 60534-2)
Weight	~2,9 Kg

The product is compliant with PED Directive 2014/68/UE

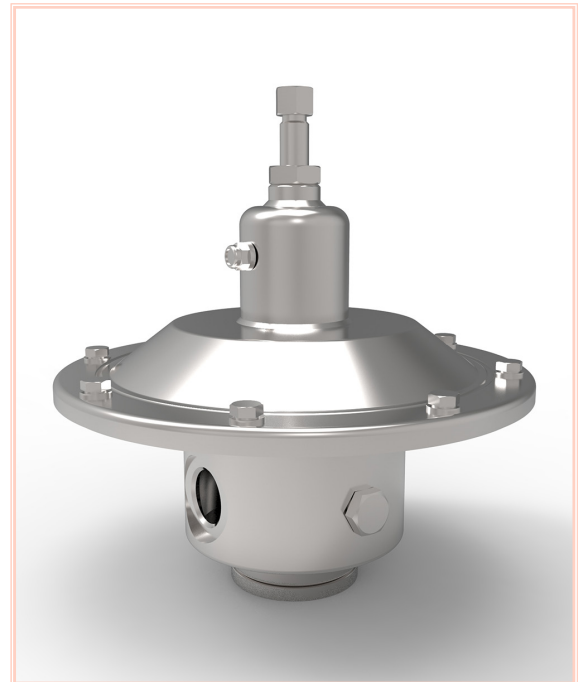

MATERIALS:

Body and bonnet	AISI 316L
Internal parts	AISI 316L
Adjusting spring (not in contact with the fluid)	AISI 302
O-Ring and shuttle gasket (different compounds available on request)	FPM
Diaphragm	NBR+PTFE

MAINTENANCE KIT:

KS33C repair kit available on request.

Kit contains: shutter assembly, O-ring and diaphragm assembly.

Note

Chemical compatibility fluids/materials, has to be verified at RFQ stage with ODE sales dept.

"ODE" reserves the right to carry out technical and aesthetic modifications without prior notice.

S 3 3 C # N N N N N N N N N N N N

Model

Connections

P	0	G 1/2 - F
H	0	1/2 NPT - F
0	5	SO ANSI 150 RF 1/2"
0	1	EN1092-1/01B/DN50/PN40

Overflow pressure

N	0	5 ÷ 45 mbar
P	0	20 ÷ 200 mbar
Q	0	150 ÷ 700 mbar

Accessories

0	0	-
0	4	Fixed calibration
0	5	Precalibrated
0	6	With pressure gauge
0	8	Degreased use O ₂
1	6	O-Ring FDA compliance

Certifications

R	0	CE
U	0	CE+Atex 2014/34/UE
Y	0	CE+EAC TR CU 032/2013 ⁽¹⁾
V	0	CE+EAC TR CU 012/2011 ⁽¹⁾

⁽¹⁾ version certifiable on request

Seal


9	9	FPM
1	7	NBR for liquids
1	8	EPDM for liquids
1	9	FPM for liquids
9	7	NBR
9	8	EPDM

standard versions

versions available on request

DIMENSIONS:

version with connections G 1/2 - F

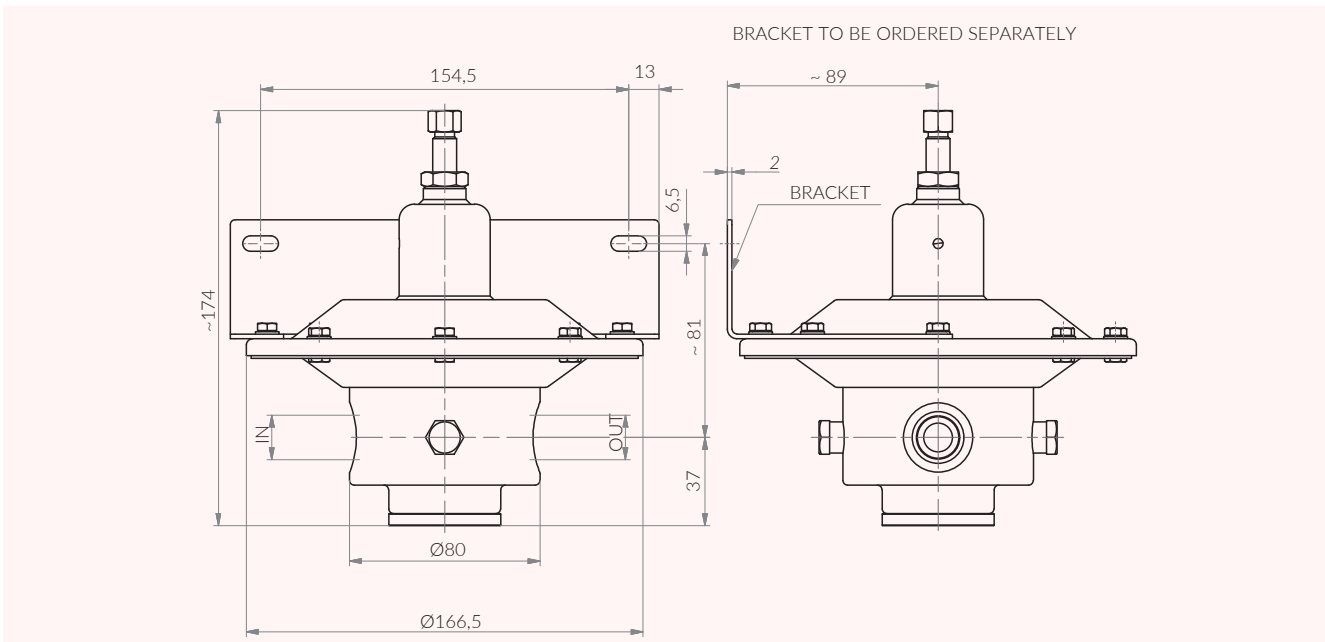

For other versions, please contact ODE Sales Office