

UNIVERSAL COMPRESSION FITTINGS

YELLOW BRASS

PLUS

**GREAT GRIPPING SYSTEM THANKS TO
THE FERRULE AND THE LOCKING NUT**

**RESISTANT TO VIBRATIONS AND TO
WATER HAMMERS**

**SUITABLE WITH DIESEL FOR DOMESTIC
HEATING**


**USABLE WITH PLASTIC TUBES THANKS
TO THE INTERNAL SLEEVE WITHOUT
REDUCTION FLOW DIAMETER**


**EXCELLENT DURABILITY OVERTIME
WITH EXCELLENT PERFORMANCE**

**HIGH STRENGTH BRASS FOR GREATER
MECHANICAL RELIABILITY**

RANGE FROM Ø4 TO Ø28 MM



p. 218 / **3400**p. 219 / **3422**p. 219 / **3430**p. 220 / **3440**p. 220 / **3442**p. 221 / **3460**p. 221 / **3465**p. 222 / **3480**p. 222 / **3490**p. 222 / **3500**p. 223 / **3510**p. 223 / **3520**p. 223 / **3530**p. 224 / **3540**p. 224 / **3552**p. 224 / **3560**p. 225 / **3572**p. 225 / **3467**p. 225 / **3468**p. 226 / **AS**p. 226 / **AS-PU**

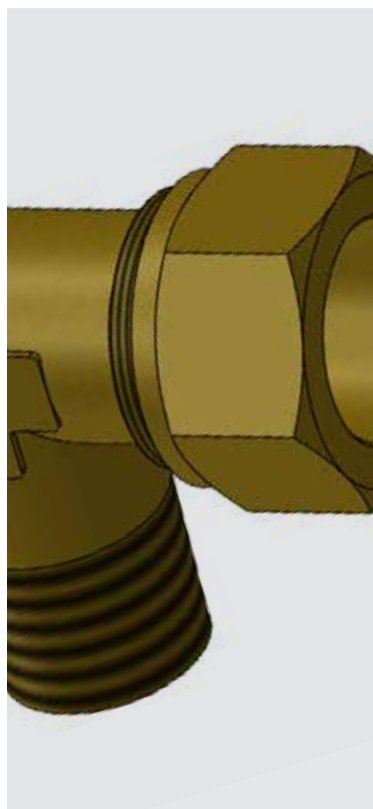

0°C ÷ 80°C



Up to 100 Bar
Meanwhile, for each dimensions, pressure are function of the quality of the tube, condition, thickness and the maximal using temperature. Also mechanical constraints reduce the level of pressure application



Compressed air, water and fluids suitable with construction materials



Taper gas BSPT ISO 7 from R1/8" to R1"
Parallel gas BSPP ISO 228 from G1/8" to G1"



Metal tubes: brass, copper
Plastic tubes: self fastening tube AS to be used with our 3467 and 3468.



Body: Lathed yellow brass UNI EN 12164 CW 614N
Printed yellow brass UNI EN12165 CW 617N

Lock nut: Yellow brass UNI EN 12164 CW 614N

Ogive: Yellow brass UNI EN 12164 CW 614N

Available on demand NPT thread



Products in compliance with the directive 2002/95/EC

RoHS2

Products in compliance with the directive 2011/65/EU

INSTRUCTION FOR ASSEMBLY

- Cut the tube and remove the internal and external burrs
- Insert the nut into the tube and lubricated the thread insert
- Put the ogive on the final part of the tube
- Push the tube until is stopped into the fittings
- Screw the lubricated in order to obtain the tube secured tank to grip of the ogive


TIGHTENING TORQUE

TUBES Ø	4	6	8	10	12	14	16	18	20	22	28
MAXIMUM TORQUE	0,8 Kg/m	1,6 Kg/m	1,6 Kg/m	1,9 Kg/m	3 Kg/m	3,5 Kg/m	5 Kg/m	6 Kg/m	6 Kg/m	7 Kg/m	9 Kg/m



3400

Male connector BSPT threaded

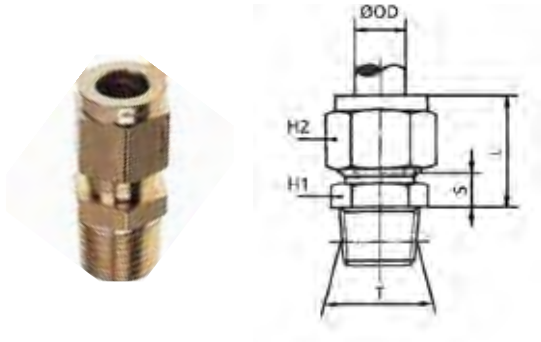


CODE	T	ØOD	L	S	H1	H2	GR.
3400TR184	R1/8"	4	17,0	7,0	10	10	-
3400TR144	R1/4"	4	20,0	9,5	14	10	-
3400TR186	R1/8"	6	18,0	7,5	11	13	18,0
3400TR146	R1/4"	6	18,0	7,5	14	13	25,0
3400TR386	R3/8"	6	19,0	8,5	17	13	-
3400TR188	R1/8"	8	19,5	7,0	13	14	22,0
3400TR148	R1/4"	8	19,5	7,0	14	14	27,0
3400TR388	R3/8"	8	20,5	8,0	17	14	33,0
3400TR1810	R1/8"	10	24,0	9,0	17	19	-
3400TR1410	R1/4"	10	24,0	9,0	17	19	48,0
3400TR3810	R3/8"	10	24,0	9,0	17	19	49,0
3400TR1210	R1/2"	10	25,0	10,0	22	19	67,0
3400TR1412	R1/4"	12	24,0	9,0	19	22	-
3400TR3812	R3/8"	12	24,0	9,0	19	22	-
3400TR1212	R1/2"	12	25,0	10,0	22	22	-
3400TR1414	R1/4"	14	26,0	10,5	22	24	-
3400TR3814	R3/8"	14	25,0	8,0	22	24	70,0
3400TR1214	R1/2"	14	26,0	9,0	22	24	80,0
3400TR1216	R1/2"	16	27,0	9,5	24	27	101,0
3400TR3416	R3/4"	16	28,0	10,5	27	27	-
3400TR1218	R1/2"	18	30,0	10,5	27	30	132,0
3400TR3418	R3/4"	18	30,0	10,5	27	30	143,0
3400TR1220	R1/2"	20	32,0	11,0	30	32	-
3400TR3420	R3/4"	20	32,0	11,0	30	32	-
3400TR1222	R1/2"	22	33,0	11,0	32	36	-
3400TR3422	R3/4"	22	33,0	11,0	32	36	195,0
3400TR122	R1"	22	33,0	11,0	36	36	225,0
3400TR128	R1"	28	36,0	11,0	41	42	-



3422


Male connector BSPP thread with seal

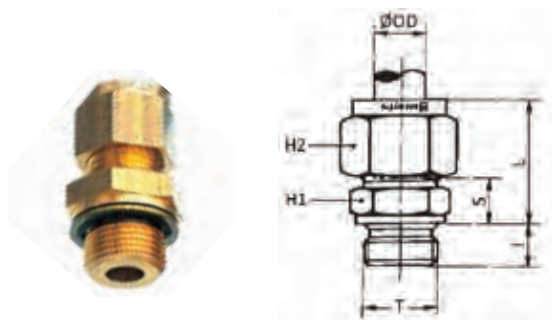

CODE	T	ØOD	L	I	S	H1	H2
3422TR184	G1/8"	4	16,5	6,5	8,0	13	10
3422TR186	G1/8"	6	18,0	6,5	8,5	13	13
3422TR146	G1/4"	6	18,0	8,0	9,5	17	13
3422TR188	G1/8"	8	19,0	6,5	8,5	13	14
3422TR148	G1/4"	8	19,5	8,0	9,0	17	14
3422TR388	G3/8"	8	24,5	10,8	11,0	22	14
3422TR1410	G1/4"	10	24,0	8,0	11,0	17	19
3422TR3810	G3/8"	10	24,0	11,0	11,5	22	19
3422TR1412	G1/4"	12	24,0	8,0	11,0	19	22
3422TR3814	G3/8"	14	25,0	11,0	10,5	22	24
3422TR1214	G1/2"	14	25,0	12,0	11,0	27	24
3422TR3816	G3/8"	16	27,0	11,0	12,0	22	27
3422TR1216	G1/2"	16	27,0	12,0	12,5	27	27
3422TR1218	G1/2"	18	29,5	12,0	12,5	27	30
3422TR3418	G3/4"	18	29,5	13,0	13,0	32	30
3422TR3422	G3/4"	22	32,0	13,0	13,0	32	36
3422TR122	G1"	22	32,0	15,0	13,5	41	36
3422TR128	G1"	28	35,5	15,0	13,5	41	42

3430

Female connector BSPP thread

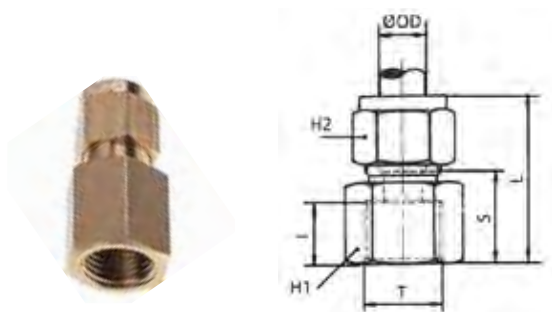


CODE	T	ØOD	I	S	L	H1	H2	GR.
3430TR184	G1/8"	4	9,5	16,5	26	14	10	-
3430TR144	G1/4"	4	13,5	20,5	30	17	10	-
3430TR186	G1/8"	6	9,5	17,0	28	14	13	26,0
3430TR146	G1/4"	6	13,5	21,0	32	17	13	35,0
3430TR188	G1/8"	8	9,5	16,5	29	14	14	28,0
3430TR148	G1/4"	8	13,5	20,5	33	17	14	36,0
3430TR388	G3/8"	8	14,0	21,0	34	22	14	53,0
3430TR1410	G1/4"	10	13,5	21,5	37	17	19	52,0
3430TR3810	G3/8"	10	14,0	22,0	37	22	19	70,0
3430TR1210	G1/2"	10	18,5	26,5	42	27	19	102,0
3430TR3814	G3/8"	14	14,0	21,0	38	22	24	82,0
3430TR1214	G1/2"	14	18,5	25,5	43	27	24	113,0
3430TR1216	G1/2"	16	18,5	26,0	44	27	27	-
3430TR1218	G1/2"	18	18,5	26,0	45	27	30	147,0
3430TR3418	G3/4"	18	19,5	27,0	46	32	30	169,0
3430TR3422	G3/4"	22	19,5	26,5	48	32	36	205,0



3440


Male elbow BSPT thread

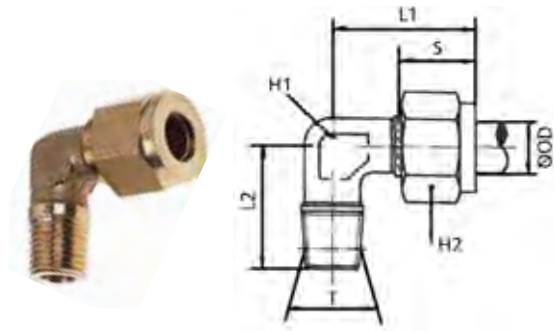

CODE	T	ØD	L1	L2	S	H1	H2	GR.
3440TR184	R1/8"	4	19,0	17,0	12,0	8	10	-
3440TR144	R1/4"	4	19,0	20,0	12,0	10	10	-
3440TR186	R1/8"	6	22,0	18,0	13,0	8	13	22,0
3440TR146	R1/4"	6	22,0	21,5	13,0	10	13	31,0
3440TR188	R1/8"	8	28,0	18,5	15,0	10	14	29,0
3440TR148	R1/4"	8	28,0	22,0	15,0	10	14	34,0
3440TR388	R3/8"	8	28,0	24,0	15,0	12	14	45,0
3440TR1410	R1/4"	10	30,0	25,0	17,0	12	19	53,0
3440TR3810	R3/8"	10	30,0	25,5	17,0	12	19	62,0
3440TR1210	R1/2"	10	36,0	32,0	17,0	19	19	107,0
3440TR1412	R1/4"	12	30,0	26,0	18,0	15	22	-
3440TR3812	R3/8"	12	30,0	27,0	18,0	15	22	-
3440TR1212	R1/2"	12	36,0	32,0	18,0	19	22	-
3440TR3814	R3/8"	14	35,0	30,0	18,0	19	24	105,0
3440TR1214	R1/2"	14	35,0	32,0	18,0	19	24	109,0
3440TR3816	R3/8"	16	39,0	30,0	21,0	19	27	-
3440TR1216	R1/2"	16	39,0	33,5	21,0	19	27	135,0
3440TR3416	R3/4"	16	41,0	36,5	21,0	23	27	-
3440TR1218	R1/2"	18	41,0	35,5	21,5	23	30	176,0
3440TR3418	R3/4"	18	41,0	36,5	21,5	23	30	203,0
3440TR3420	R3/4"	20	42,0	38,0	21,5	23	32	-
3440TR3422	R3/4"	22	50,0	40,0	25,0	27	36	296,0
3440TR122	R1"	22	50,0	44,0	25,0	27	36	324,0
3440TR128	R1"	28	54,0	48,0	30,0	32	42	-

3442

Swivel male elbow BSPP thread

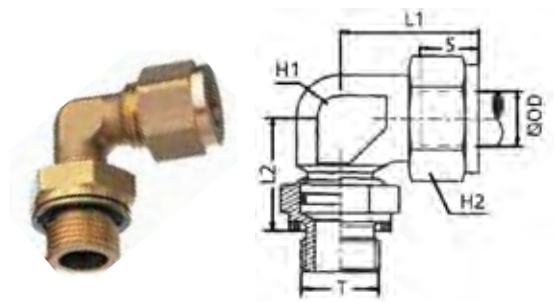


CODE	T	ØD	L1	L2	S	H1	H2	GR.
3442TR184	G1/8"	4	19,0	16,0	12,0	8	10	-
3442TR144	G1/4"	4	19,0	22,0	12,0	10	10	-
3442TR186	G1/8"	6	22,0	16,0	13,0	8	13	23,0
3442TR146	G1/4"	6	22,0	22,0	13,0	10	13	31,0
3442TR188	G1/8"	8	28,0	18,5	15,0	10	14	29,0
3442TR148	G1/4"	8	28,0	22,0	15,0	10	14	34,0
3442TR388	G3/8"	8	28,0	24,0	15,0	12	14	43,0
3442TR1410	G1/4"	10	30,0	22,0	17,0	12	19	53,0
3442TR3810	G3/8"	10	30,0	24,0	17,0	12	19	64,0
3442TR1210	G1/2"	10	30,0	29,5	17,0	19	19	102,0
3442TR3814	G3/8"	14	35,0	25,0	18,0	19	24	105,0
3442TR1214	G1/2"	14	35,0	29,5	18,0	19	24	108,0
3442TR1218	G1/2"	18	41,0	30,5	21,0	23	30	174,0
3442TR3418	G3/4"	18	41,0	32,8	21,5	23	30	202,0
3442TR3422	G3/4"	22	50,0	32,8	25,0	27	36	295,0
3442TR122	G1"	22	50,0	43,5	25,0	27	36	323,0
3442TR128	G1"	28	54,0	43,5	30,0	32	42	-



3460


Tee male BSPT thread



CODE	T	ØOD	L	S	A	H1	H2	GR.
3460TR184	R1/8"	4	19,0	9,5	17,0	8	10	-
3460TR185	R1/8"	5	21,0	11,0	17,5	8	12	-
3460TR186	R1/8"	6	22,0	11,0	18,0	8	13	-
3460TR146	R1/4"	6	27,0	16,0	21,5	10	13	-
3460TR188	R1/8"	8	28,0	15,0	18,5	10	14	-
3460TR148	R1/4"	8	28,0	15,0	22,0	10	14	-
3460TR1410	R1/4"	10	30,0	14,5	25,0	12	19	-
3460TR3810	R3/8"	10	30,0	14,5	25,5	12	19	-
3460TR3812	R3/8"	12	30,0	15,0	27,0	15	22	-
3460TR3814	R3/8"	14	35,0	18,0	30,0	19	24	-
3460TR1214	R1/2"	14	35,0	18,0	32,0	19	24	-
3460TR3815	R3/8"	15	35,0	18,0	30,0	19	24	-
3460TR1215	R1/2"	15	35,0	18,0	32,0	19	24	-
3460TR3816	R3/8"	16	39,0	21,0	30,0	19	27	-
3460TR1216	R1/2"	16	39,0	21,0	33,5	19	27	-

3465

Swivel tee male BSPP thread




CODE	T	ØOD	L1	L2	H1	H2	H3	GR.
3465TR184	G1/8"	4	19,0	25,0	8	10	13	-
3465TR144	G1/4"	4	19,0	27,0	8	10	17	-
3465TR186	G1/8"	6	22,0	28,0	8	13	13	-
3465TR146	G1/4"	6	22,0	30,0	8	13	17	-
3465TR188	G1/8"	8	28,0	34,0	10	14	13	-
3465TR148	G1/4"	8	28,0	36,0	10	14	17	-
3465TR1410	G1/4"	10	30,0	38,0	12	19	17	-
3465TR3810	G3/8"	10	30,0	38,5	12	19	22	-
3465TR3814	G3/8"	14	35,0	43,5	19	24	22	-
3465TR1214	G1/2"	14	35,0	44,5	19	24	27	-
3465TR1218	G1/2"	18	41,0	50,5	23	30	27	-
3465TR3418	G3/4"	18	41,0	51,5	23	30	32	-
3465TR3422	G3/4"	22	50,0	60,5	27	36	32	-
3465TR122	G1"	22	50,0	61,0	27	36	41	-
3465TR128	G1"	28	55,0	66,0	32	42	41	-



3480


Union connector

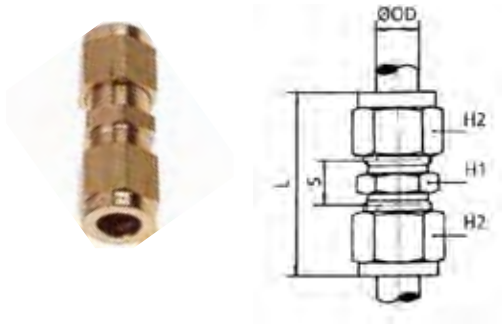

CODE	ØD	S	L	H1	H2	GR.
3480TR4	4	10,0	28,0	10	10	-
3480TR6	6	11,0	32,0	11	13	19,0
3480TR8	8	10,0	36,0	13	14	28,0
3480TR10	10	13,0	42,0	17	19	69,0
3480TR12	12	13,0	42,0	19	22	-
3480TR14	14	11,0	45,0	22	24	151,0
3480TR16	16	13,0	48,0	24	27	180,0
3480TR18	18	14,0	53,0	27	30	201,0
3480TR20	20	14,0	56,0	30	32	-
3480TR22	22	14,0	60,0	32	36	225,0
3480TR28	28	14,0	64,0	42	41	-

3490


Bulkhead union connector

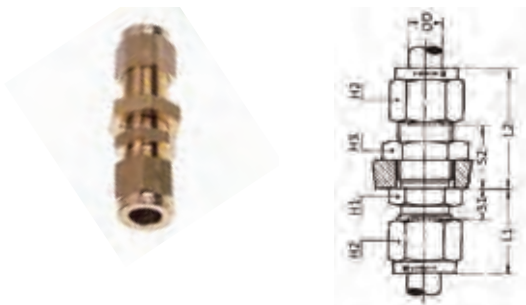

CODE	ØOD	L1	L2	S1	S2	H1	H2	H3	GR.
3490TR4	4	17,0	27,0	7,0	17,0	10	10	13	-
3490TR6	6	19,0	28,0	7,5	17,5	13	13	14	-
3490TR8	8	20,0	29,0	7,0	17,0	14	14	17	-
3490TR10	10	25,0	33,0	9,0	19,0	19	19	22	-
3490TR12	12	25,0	33,0	9,0	19,0	22	22	22	-
3490TR14	14	25,0	35,0	8,0	18,0	24	24	24	-
3490TR18	18	30,0	40,0	10,5	20,5	27	30	30	-
3490TR22	22	32,0	42,0	11,0	21,0	36	36	36	-
3490TR28	28	40,0	52,0	19,0	30,0	42	42	42	-

3500

Union elbow

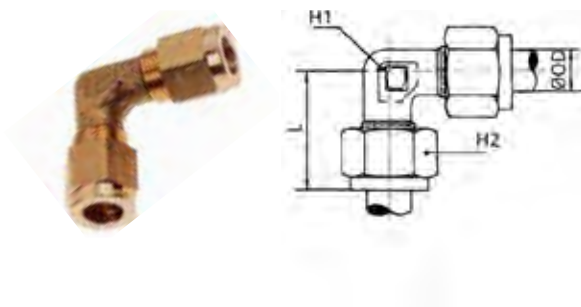


CODE	ØD	L	H1	H2	GR.
3500TR4	4	19,0	5	10	-
3500TR6	6	22,0	8	13	26,0
3500TR8	8	28,0	10	14	34,0
3500TR10	10	30,0	12	19	74,0
3500TR12	12	30,0	15	22	-
3500TR14	14	35,0	19	24	156,0
3500TR16	16	39,0	19	27	190,0
3500TR18	18	41,0	23	30	232,0
3500TR20	20	42,0	23	32	-
3500TR22	22	50,0	27	36	254,0
3500TR28	28	54,5	32	42	-



3510


Union tee

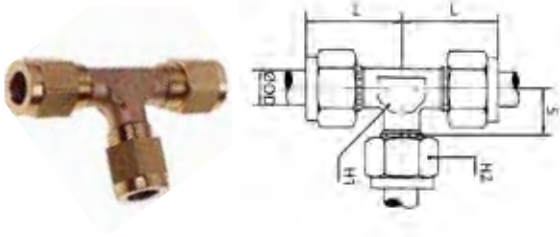

CODE	ØD	S	L	H1	H2	GR.
3510TR4	4	9,5	19,0	8	10	-
3510TR6	6	11,0	22,0	8	13	33,0
3510TR8	8	15,0	28,0	10	14	45,0
3510TR10	10	14,5	30,0	12	19	105,0
3510TR12	12	15,0	30,0	15	22	-
3510TR14	14	18,0	35,0	19	24	230,0
3510TR16	16	21,0	39,0	19	27	275,0
3510TR18	18	21,5	41,0	23	30	333,0
3510TR20	20	21,5	42,0	23	32	-
3510TR22	22	29,0	50,0	27	36	364,0
3510TR28	28	30,0	55,0	32	42	-

3520


Union Cross

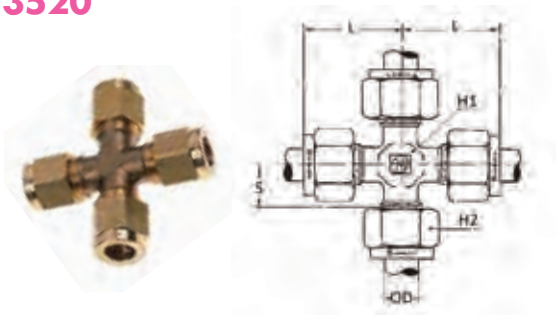

CODE	ØD	S	L	H1	H2	GR.
3520TR6	6	11,0	22,0	8	12	-
3520TR8	8	15,0	28,0	11	14	-
3520TR10	10	15,0	30,0	14	19	-
3520TR12	12	15,0	30,0	15	22	-
3520TR14	14	18,0	35,0	20	24	-
3520TR16	16	21,0	39,0	20	27	-
3520TR18	18	21,5	41,0	25	30	-
3520TR20	20	21,5	42,0	25	32	-
3520TR22	22	29,0	50,0	27	36	-

3530

Locking nut

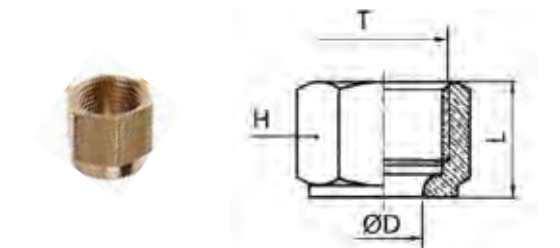


CODE	ØD	T	L	H	GR.
3530TR4	4	M8X1	11,0	10	-
3530TR6	6	M10X1	11,0	13	5,4
3530TR8	8	M12X1	13,0	14	7,0
3530TR10	10	M16X1,5	15,0	19	18,2
3530TR12	12	M18X1,5	15,0	22	-
3530TR14	14	M20X1,5	15,0	24	44,3
3530TR16	16	M22X1,5	17,0	27	55,6
3530TR18	18	M24X1,5	18,0	30	64,2
3530TR20	20	M27X1,5	18,0	32	-
3530TR22	22	M30X1,5	19,0	36	76,3
3530TR28	28	M36X1,5	21,0	42	-



3540


Ogive

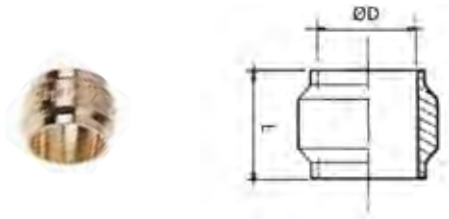

CODE	ØD	L	GR.
3540TR4	4	6,0	-
3540TR6	6	6,5	0,82
3540TR8	8	7,0	1,12
3540TR10	10	8,0	3,30
3540TR12	12	8,0	-
3540TR14	14	8,5	4,42
3540TR16	16	9,0	5,00
3540TR18	18	9,5	5,90
3540TR20	20	11,0	-
3540TR22	22	11,0	7,10
3540TR28	28	12,0	-

3552

Ring and internal sleeve

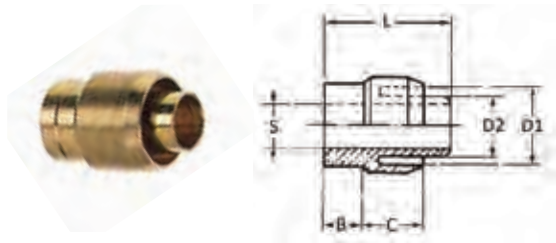

CODE	D1	D2	L	B	C	S	GR.
3552TR64	6	4	12,5	4	6	3,5	-
3552TR855	8	5,5	14,0	4	7,5	4,5	-
3552TR86	8	6	14,0	4	7,4	5	-
3552TR107	10	7	14,0	4	8,5	6,5	-
3552TR108	10	8	14,0	4	8,3	6,5	-
3552TR128	12	8	14,5	4	8,5	7,5	-
3552TR1210	12	10	14,5	4	8,5	8,5	-

The ring 3552 are designed for Polyamide tube installed in compression fittings.


Designed ensures the both functions of ring and sleeve.

The front part has the function of the ring; introduce tube in the back part of 3552 and tighten the nut to get tightening and tightness.

There is not reduction flow diameter.

3560

Adapter male BSPT thread

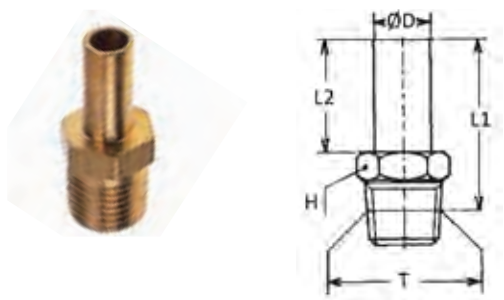


CODE	T	ØD	L1	L2	H	GR.
3560TR186	R1/8"	6	26,5	15	11	-
3560TR146	R1/4"	6	31	15	14	-
3560TR188	R1/8"	8	28,5	17	11	-
3560TR148	R1/4"	8	33	17	14	-
3560TR388	R3/8"	8	33,7	17	17	-
3560TR1410	R1/4"	10	36	20	14	-
3560TR3810	R3/8"	10	36,5	20	17	-
3560TR1210	R1/2"	10	41	20	22	-
3560TR1412	R1/4"	12	36	20	14	-
3560TR3812	R3/8"	12	36,5	20	17	-
3560TR1212	R1/2"	12	41	20	22	-
3560TR3814	R3/8"	14	38	21,5	17	-
3560TR1214	R1/2"	14	42,5	21,5	22	-
3560TR1216	R1/2"	16	44	23	22	-
3560TR1218	R1/2"	18	44,5	23,5	22	-
3560TR3418	R3/4"	18	47,5	23,5	27	-
3560TR3422	R3/4"	22	48,5	25,5	27	-



3572


Adapter male BSPP thread

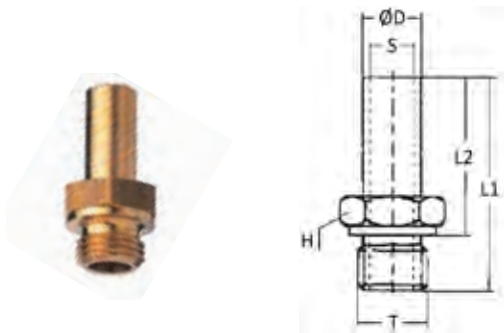

CODE	T	ØD	L1	L2	S	H	GR.
3572TR184	G1/8"	4	25,5	19	2	13	-
3572TR186	G1/8"	6	26,5	20	4	13	-
3572TR146	G1/4"	6	30	22	4	17	-
3572TR188	G1/8"	8	28,5	22	6	13	-
3572TR148	G1/4"	8	32	24	6	17	-
3572TR1410	G1/4"	10	35	27	8	17	-
3572TR3810	G3/8"	10	38,5	27,5	8	22	-
3572TR1210	G1/2"	10	40,5	28,5	8	27	-
3572TR3814	G3/8"	14	40	29	11	22	-
3572TR1214	G1/2"	14	42	30	12	27	-
3572TR1218	G1/2"	18	44	32	14	27	-
3572TR3418	G3/4"	18	46	33	16	32	-
3572TR3422	G3/4"	22	48	35	20	32	-
3572TR122	G1"	22	50,5	35,5	20	41	-
3572TR128	G1"	28	55	40	25	41	-

3467


Male barb connector BSPP thread

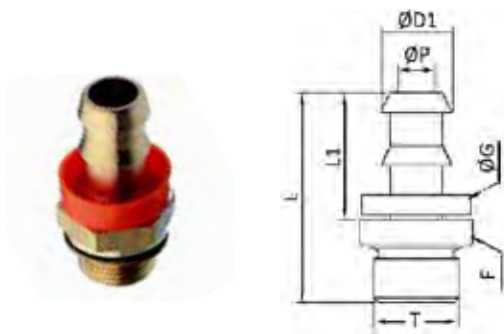

CODE	T	ØD1	DN	L	L1	F	ØG	ØP	GR.
3467TR1814	G1/8"	1/4"(6,3MM)	1/4"	31,5	20,0	13	14,0	4,0	14,0
3467TR1414	G1/4"	1/4"(6,3MM)	1/4"	35,0	20,0	17	14,0	4,0	26,0
3467TR1438	G1/4"	3/8"(9,5MM)	3/8"	39,1	24,1	17	17,0	7,5	27,0
3467TR3838	G3/8"	3/8"(9,5MM)	3/8"	42,5	24,1	22	17,0	7,5	47,0
3467TR3812	G3/8"	1/2"(12,7MM)	1/2"	46,5	28,0	22	20,5	10,0	48,0
3467TR1212	G1/2"	1/2"(12,7MM)	1/2"	48,5	28,0	27	20,5	10,0	79,0
3467TR1258	G1/2"	5/8"(15,9MM)	5/8"	56,5	36,5	27	24,0	13,5	73,0
3467TR3458	G3/4"	5/8"(15,9MM)	5/8"	58,5	36,5	32	24,0	13,5	117,0
3467TR3434	G3/4"	3/4"(19,1MM)	3/4"	65,3	43,0	32	27,0	16,0	123,0

3468

Female barb connector BSPP thread

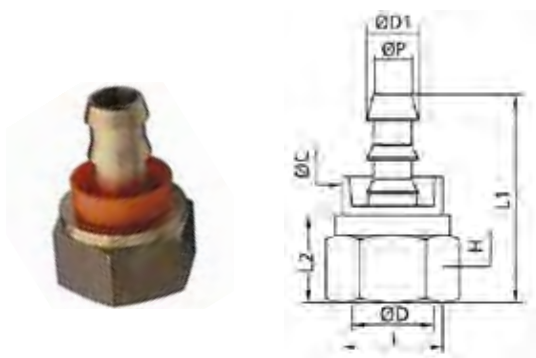

CODE	DN	T	ØD1	D	L1	L2	ØC	E	ØP	GR.
3468TRM1014	6	M10X1	1/4"(6,3MM)	1/4"	33,5	11,0	16,5	13,0	4,0	17,0
3468TRM1214	8	M12X1	1/4"(6,3MM)	1/4"	34,5	13,0	16,5	14,0	4,8	18,0
3468TRM1614	10	M16X1,5	1/4"(6,3MM)	1/4"	35,8	15,0	16,5	19,0	4,8	33,0
3468TRM1638	10	M16X1,5	3/8"(9,5MM)	3/8"	39,3	15,0	19,5	19,0	7,5	35,0
3468TRM2038	14	M20X1,5	3/8"(9,5MM)	3/8"	39,3	15,0	19,5	24,0	7,5	52,0
3468TRM2012	14	M20X1,5	1/2"(12,7MM)	1/2"	44,0	15,0	23,5	24,0	10,0	56,0
3468TRM2212	15	M22X1,5	1/2"(12,7MM)	1/2"	45,0	17,0	23,5	27,0	10,0	77,0
3468TRM2412	16	M24X1,5	1/2"(12,7MM)	1/2"	47,0	18,0	23,5	30,0	10,0	99,0
3468TRM2458	16	M24X1,5	5/8"(15,9MM)	5/8"	55,0	18,0	27,0	30,0	13,5	97,0
3468TRM3034	22	M30X1,5	3/4"(19,1MM)	3/4"	62,0	18,5	30,0	36,0	16,0	137,0



AS

AS Self fastening



CODE	DN	INTERNAL DIAMETER	TOLERANCES	BENDING RADIUS	KG/M	LENGHT (M)
AS1/4	6	6,35	0/+0,5	20	0,18	40
AS3/8	8	9,52	0/+0,5	40	0,21	40
AS1/2	10	12,7	0/+0,8	50	0,28	40
AS5/8	12	15,87	0/+0,8	60	0,36	40
AS3/4	20	19,05	0/+0,8	100	0,38	40

Sizes ODxID	 Light blue	 Red	 Green
1/4	AS1/4BL	AS1/4RO	AS1/4VE
3/8	AS3/8BL	AS3/8RO	AS3/8VE
1/2	AS1/2BL	AS1/2RO	AS1/2VE
5/8	AS5/8BL	AS5/8RO	AS5/8VE
3/4	AS3/4BL	AS3/4RO	AS3/4VE

AS-PU

Self-fastening tubes with polyester yarn reinforcement



CODE	ØI.D	ØI.D	ØO.D	TOTAL THINKNESS	BENDING RADIUS	WORKING PRESSURE 23°C	WORKING PRESSURE 40°C	WORKING PRESSURE 60°C	BURST PRESSURE 23°C	KG/M	LENGHT
AS-PU1/4	1/4	6,3	12,5	3,25	25	25	12	6	95	125	100
AS-PU3/8	3/8	9,5	16	3,25	50	20	10	5	80	125	100
AS-PU1/2	1/2	12,7	19	3,5	75	20	10	5	80	125	100
AS-PU5/8	5/8	16,0	23	3,75	120	17	8	4	60	250	50
AS-PU3/4	3/4	19,0	27	4	150	17	8	4	60	300	50

Sizes ODxID	 Light blue	 Red	 Green	 Black
1/4	AS-PU1/4AZ	AS-PU1/4RO	AS-PU1/4VD	AS-PU1/4NE
3/8	AS-PU3/8AZ	AS-PU3/8RO	AS-PU3/8VD	AS-PU3/8NE
1/2	AS-PU1/2AZ	AS-PU1/2RO	AS-PU1/2VD	AS-PU1/2NE
5/8	AS-PU5/8AZ	AS-PU5/8RO	AS-PU5/8VD	AS-PU5/8NE
3/4	AS-PU3/4AZ	AS-PU3/4RO	AS-PU3/4VD	AS-PU3/4NE

