

**STANDARD
FITTINGS**
DISTRIBUTION
MANIFOLDS

PLUS

COMPACTS

LIGHT

MANY CONFIGURATIONS



p. 353 / **4100**p. 353 / **4150**p. 354 / **4200**



-10°C ÷ +80°C



20 Bar



Compressed air, oil and fluids suitable with construction materials



Parallel gas BSPP ISO 228 from G1/8" to G1/2"
Metric ISO 262 - M5



Aluminum with tumbling
Anodized on demand

Available on demand and drawing distribution manifolds customized




Products in compliance with the directive 2002/95/EC

RoHS2

Products in compliance with the directive 2011/65/EU

4100


Aluminum tee cross

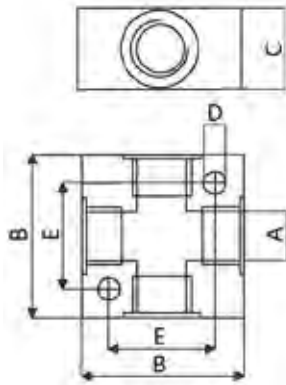

CODE	A	B	C	D	E	GR.
4100TR18	G1/8"	25,0	16,0	4,5	17,0	17,5
4100TR14	G1/4"	40,0	20,0	5,5	26,0	60,0
4100TR38	G3/8"	40,0	25,0	5,5	26,0	70,0
4100TR12	G1/2"	50,0	30,0	5,5	34,0	129,0

4150

Aluminum single distribution manifold

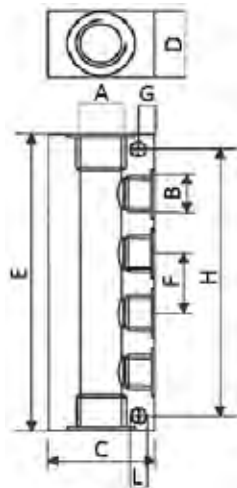


CODE	A	B	C	D	E	F	G	H	L	GR.
4150TR18M52	G1/8"	M5-2	25,0	16,0	45,0	15,0	3,5	33,0	4,5	38,0
4150TR18M53	G1/8"	M5-3	25,0	16,0	60,0	15,0	3,5	48,0	4,5	50,0
4150TR18M54	G1/8"	M5-4	25,0	16,0	75,0	15,0	3,5	63,0	4,5	64,0
4150TR18M55	G1/8"	M5-5	25,0	16,0	90,0	15,0	3,5	78,0	4,5	79,0
4150TR18M56	G1/8"	M5-6	25,0	16,0	105,0	15,0	3,5	93,0	4,5	90,0
4150TR14182	G1/4"	G1/8"-2	30,0	20,0	54,0	18,0	4,5	45,0	4,5	64,0
4150TR14183	G1/4"	G1/8"-3	30,0	20,0	72,0	18,0	4,5	63,0	4,5	86,0
4150TR14184	G1/4"	G1/8"-4	30,0	20,0	90,0	18,0	4,5	81,0	4,5	110,0
4150TR14185	G1/4"	G1/8"-5	30,0	20,0	108,0	18,0	4,5	99,0	4,5	130,0
4150TR14186	G1/4"	G1/8"-6	30,0	20,0	126,0	18,0	4,5	117,0	4,5	154,0



4150TR38142	G3/8"	G1/4"-2	40,0	25,0	68,0	24,0	4,5	51,0	5,5	136,0
4150TR38143	G3/8"	G1/4"-3	40,0	25,0	92,0	24,0	4,5	75,0	5,5	184,0
4150TR38144	G3/8"	G1/4"-4	40,0	25,0	116,0	24,0	4,5	99,0	5,5	238,0
4150TR38145	G3/8"	G1/4"-5	40,0	25,0	140,0	24,0	4,5	123,0	5,5	298,0
4150TR38146	G3/8"	G1/4"-6	40,0	25,0	164,0	24,0	4,5	147,0	5,5	338,0
4150TR12382	G1/2"	G3/8"-2	50,0	30,0	78,0	26,0	6,5	59,0	5,5	228,0
4150TR12383	G1/2"	G3/8"-3	50,0	30,0	104,0	26,0	6,5	85,0	5,5	304,0
4150TR12384	G1/2"	G3/8"-4	50,0	30,0	130,0	26,0	6,5	111,0	5,5	380,0
4150TR12385	G1/2"	G3/8"-5	50,0	30,0	156,0	26,0	6,5	137,0	5,5	456,0
4150TR12386	G1/2"	G3/8"-6	50,0	30,0	182,0	26,0	6,5	163,0	5,5	530,0
4150TR12122	G1/2"	G1/2"-2	50,0	30,0	102,0	34,0	6,5	83,0	5,5	292,0
4150TR12123	G1/2"	G1/2"-3	50,0	30,0	136,0	34,0	6,5	117,0	5,5	392,0
4150TR12124	G1/2"	G1/2"-4	50,0	30,0	170,0	34,0	6,5	151,0	5,5	488,0
4150TR12125	G1/2"	G1/2"-5	50,0	30,0	204,0	34,0	6,5	185,0	5,5	584,0
4150TR12126	G1/2"	G1/2"-6	50,0	30,0	238,0	34,0	6,5	219,0	5,5	682,0

4200

Aluminum double distribution manifold

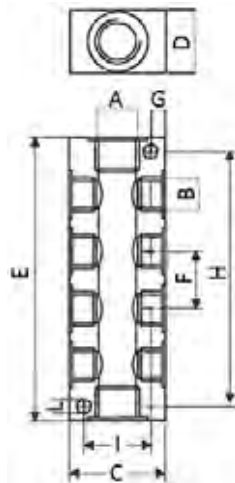

CODE	A	B	C	D	E	F	G	H	L	I	GR.
4200TR18M522	G1/8"	M5-2+2	25,0	16,0	45,0	15,0	3,5	33,0	4,5	18,0	37,0
4200TR18M533	G1/8"	M5-3+3	25,0	16,0	60,0	15,0	3,5	48,0	4,5	18,0	50,0
4200TR18M544	G1/8"	M5-4+4	25,0	16,0	75,0	15,0	3,5	63,0	4,5	18,0	62,0
4200TR18M555	G1/8"	M5-5+5	25,0	16,0	90,0	15,0	3,5	78,0	4,5	18,0	74,0
4200TR18M566	G1/8"	M5-6+6	25,0	16,0	105,0	15,0	3,5	93,0	4,5	18,0	98,0
4200TR141822	G1/4"	G1/8"-2+2	30,0	20,0	54,0	18,0	4,5	45,0	4,5	21,0	60,0
4200TR141833	G1/4"	G1/8"-3+3	30,0	20,0	72,0	18,0	4,5	63,0	4,5	21,0	81,0
4200TR141844	G1/4"	G1/8"-4+4	30,0	20,0	90,0	18,0	4,5	81,0	4,5	21,0	100,0
4200TR141855	G1/4"	G1/8"-5+5	30,0	20,0	108,0	18,0	4,5	99,0	4,5	21,0	122,0
4200TR141866	G1/4"	G1/8"-6+6	30,0	20,0	126,0	18,0	4,5	117,0	4,5	21,0	142,0
4200TR381422	G3/8"	G1/4"-2+2	40,0	25,0	68,0	24,0	6	51,0	5,5	28,0	127,0
4200TR381433	G3/8"	G1/4"-3+3	40,0	25,0	92,0	24,0	6	75,0	5,5	28,0	170,0
4200TR381444	G3/8"	G1/4"-4+4	40,0	25,0	116,0	24,0	6	99,0	5,5	28,0	216,0
4200TR381455	G3/8"	G1/4"-5+5	40,0	25,0	140,0	24,0	6	123,0	5,5	28,0	266,0
4200TR381466	G3/8"	G1/4"-6+6	40,0	25,0	164,0	24,0	6	147,0	5,5	28,0	312,0
4200TR123822	G1/2"	G3/8"-2+2	50,0	30,0	78,0	26,0	6,5	59,0	5,5	37,0	210,0
4200TR123833	G1/2"	G3/8"-3+3	50,0	30,0	104,0	26,0	6,5	85,0	5,5	37,0	278,0
4200TR123844	G1/2"	G3/8"-4+4	50,0	30,0	130,0	26,0	6,5	111,0	5,5	37,0	344,0
4200TR123855	G1/2"	G3/8"-5+5	50,0	30,0	156,0	26,0	6,5	137,0	5,5	37,0	412,0
4200TR123866	G1/2"	G3/8"-6+6	50,0	30,0	182,0	26,0	6,5	163,0	5,5	37,0	478,0
4200TR121222	G1/2"	G1/2"-2+2	50,0	30,0	102,0	34,0	6,5	83,0	5,5	37,0	268,0
4200TR121233	G1/2"	G1/2"-3+3	50,0	30,0	136,0	34,0	6,5	117,0	5,5	37,0	348,0
4200TR121244	G1/2"	G1/2"-4+4	50,0	30,0	170,0	34,0	6,5	151,0	5,5	37,0	430,0
4200TR121255	G1/2"	G1/2"-5+5	50,0	30,0	204,0	34,0	6,5	185,0	5,5	37,0	512,0
4200TR121266	G1/2"	G1/2"-6+6	50,0	30,0	238,0	34,0	6,5	219,0	5,5	37,0	596,0

