

TUBES ANTISPARKLING POLYURETHANE TUBE FLAMEX HYBRID

PLUS

GOOD FLEXIBILITY WITH A GOOD PRESSURE RESISTANCE

EXTREMELY RESISTANT AGAINST ALL KIND OF WELDING SPARKS

LONG LIFE

SELF-EXTINGUISHING IN CASE OF FIRE

FIRE CLASSIFICATION LISTED UL 94 FROM V2 TO V0

EASY AND QUICK INSTALLATION THANKS TO THE SINGLE WALLED TUBE

SUITABLE FOR ALL PUSH-IN FITTINGS

RESISTANT AGAINST MICROBES

HIGH CHEMICAL RESISTANCE
(most detergents and solvents)

SMALL BENDING RADIUS

EXCELLENT UV-RESISTANCE

TOP RESISTANCE TO ABRASION

HIGH BURST PRESSURE

SUITABLE FOR VACUUM APPLICATIONS

RECYCLABLE

SILICON FREE

RELEASED TO GERMAN AUTOMOTIVE INDUSTRY





p. 669 / **PUFW**





Special polyurethane tube Flamex hybrid, hydrolisis proof and resistant against microbes and welding sparks, suitable for WATER & other LIQUIDS.




Products in compliance with the directive 2002/95/EC

RoHS2




Products in compliance with the directive 2011/65/EU

PUFW

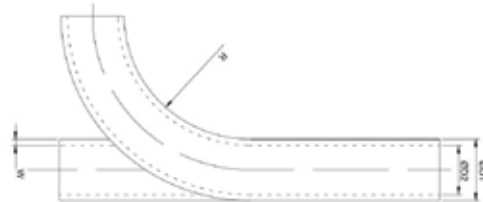Antisparkling polyurethane tube flamex




CODE	D1	D2	DN	W (MM)	BANDING RADIUS	WORKING PRESSURE AT 20°C (BAR)	BURST PRESSURE AT 20°C (BAR)	GR.	MT.
PUFW1006	10	6	6	2,0	20	10	29	60,0	50
PUFW1208	12	8	8	2,0	27	9	27	75,0	50
PUFW1410	14	10	10	2,0	50	8	25	90,0	50
PUFW1611	16	11	11	2,5	58	8	25	125,0	50


Sizes ODxID	 Light Blue	 Red	 Green
10X6	PUFW1006AZ	PUFW1006RO	PUFW1006VD
12X8	PUFW1208AZ	PUFW1208RO	PUFW1208VD
14X10	PUFW1410AZ	PUFW1410RO	PUFW1410VD
16X11	PUFW1611AZ	PUFW1611RO	PUFW1611VD




PUFW 1006

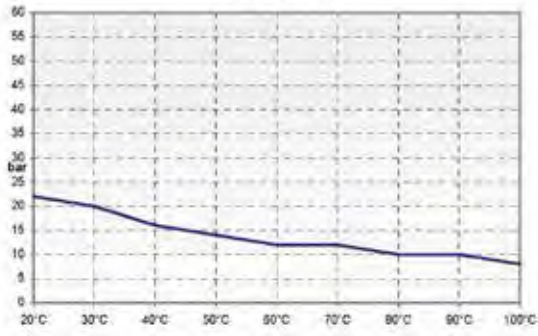

PUFW 1208

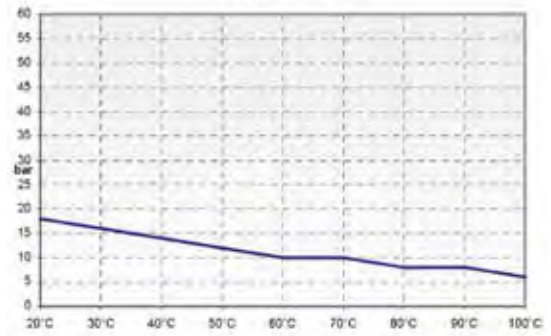

PUFW 1410

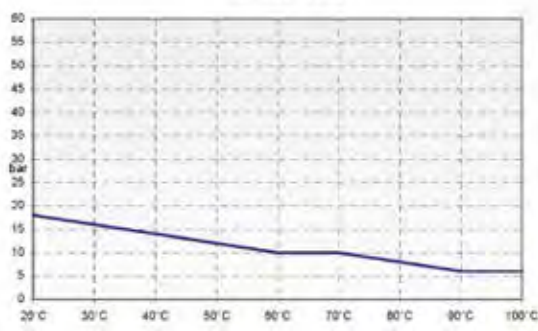

PUFW 1611

